


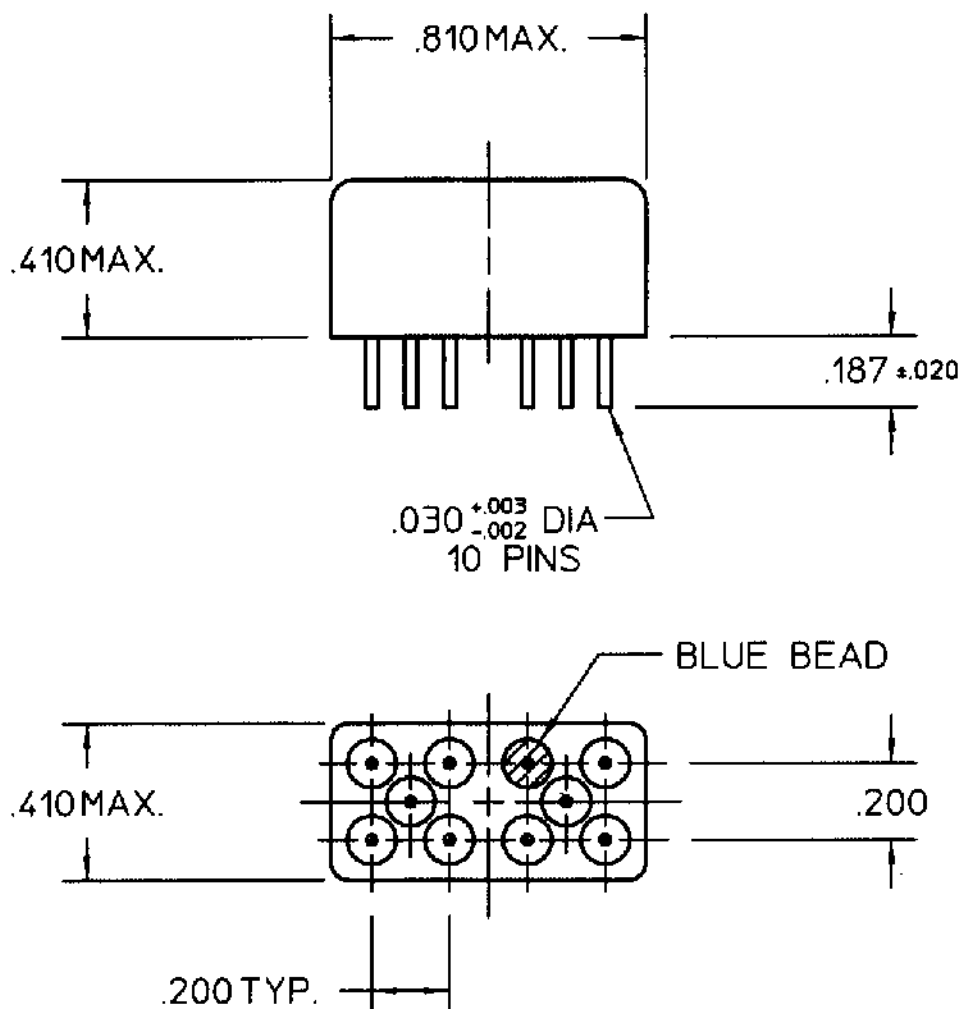

REV. 0


DCO 62810

COIL: @ 25°C

CUSTOMER DATA SHEET

SET	RESET
45 OHMS ±10% @ 25° C	45 OHMS ±10% @ 25° C
2.7 VDC NOMINAL VOLTAGE	2.7 VDC NOMINAL VOLTAGE
5.0 VDC MUST OPERATE	5.0 VDC MUST OPERATE

CONTACTS WILL SWITCH WHEN EITHER COIL IS ENERGIZED WITH POLARITY SHOWN

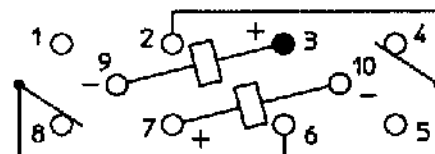

TERMINAL VIEW

ENVIRONMENT:

VIBRATION 10 Hz 2000 Hz 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: SET & RESET TIME 5 MS MAX.

BOUNCE 2 MS MAX.

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. B.D. 6/29/99

CK. 6/29/99



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C. I. I. STD.

CUST. NO.

TYPE "LS" RELAY

LSAW-2C-5B