


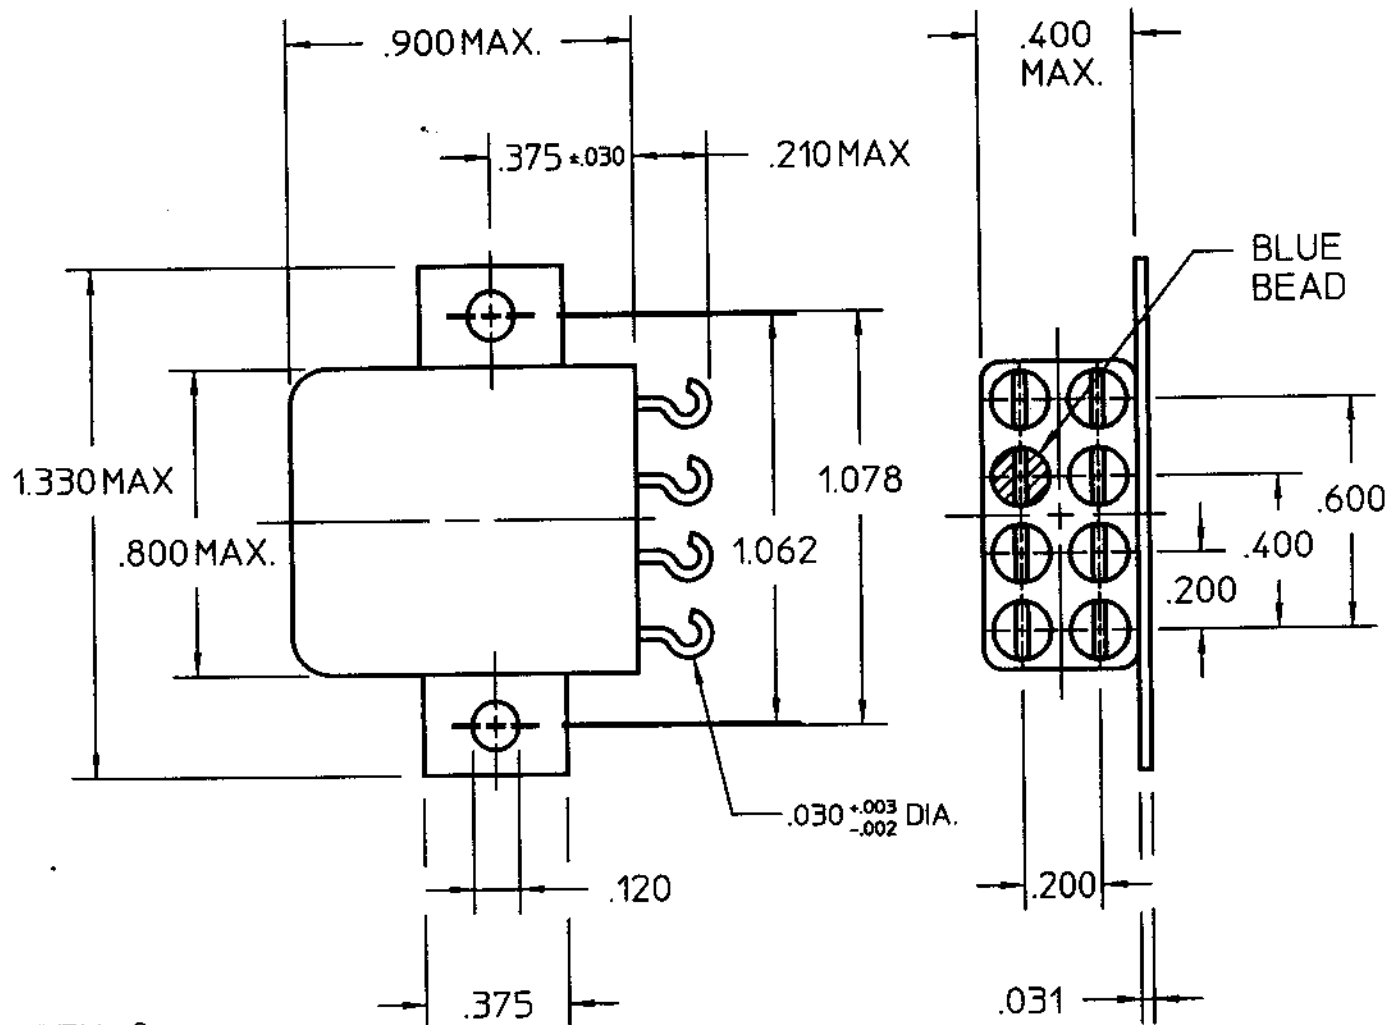

REV. 0

DCO 16963

COIL: @ 25°C
 RESISTANCE 2450 OHMS $\pm$ 10%
 NOMINAL VOLTAGE 48.0 VDC
 MUST OPERATE 25.0 VDC
 MUST RELEASE 2.73 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 $\pm$ 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 5 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

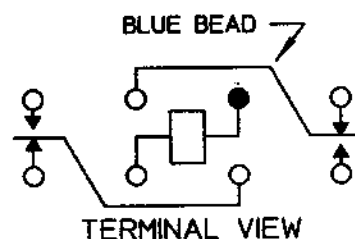

CONTACT RATING: LOW LEVEL TO 3 AMPS
 RESISTIVE 28 VDC 100,000 OPERATIONS

DR. PBB 4/18/01 CK. TLG 4-18-01

CH Technologies
 advanced control electronic solutions

CUST. C.I.I. STD.

CUST. NO. REV.

'FW' RELAY

FW1109L00