


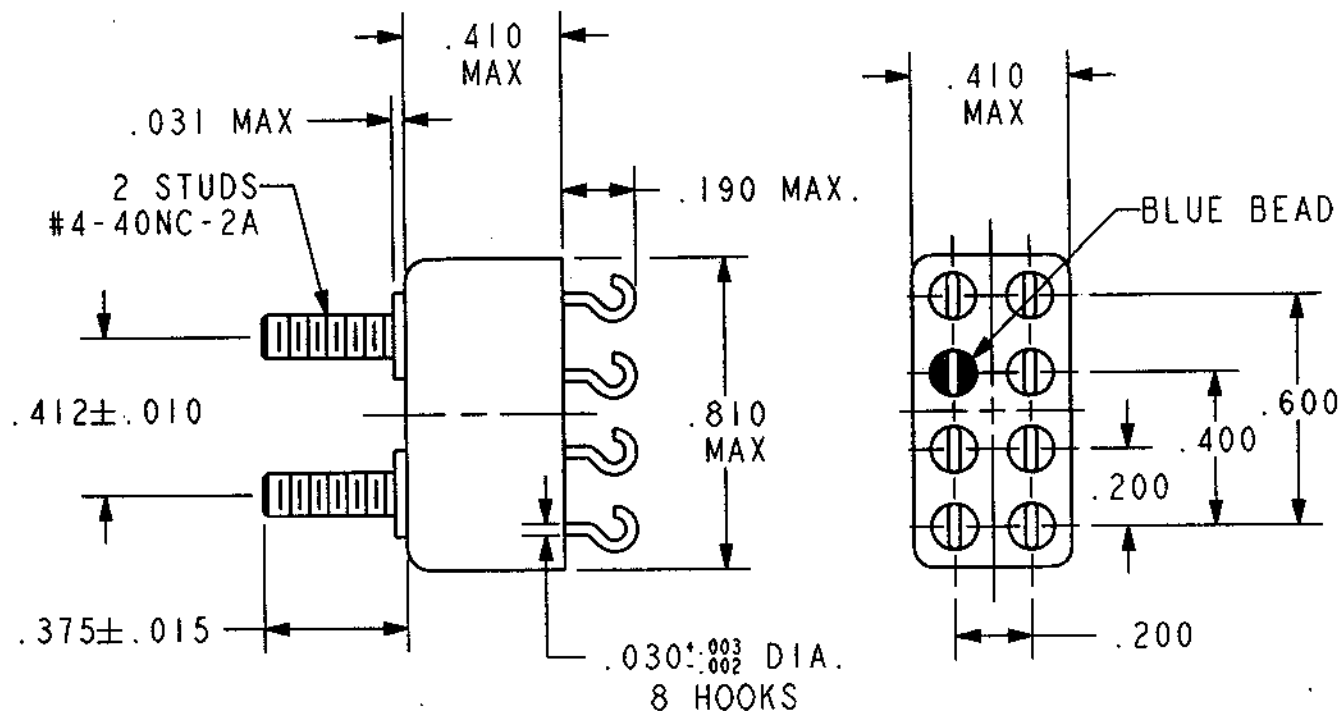

REV. 1
DCO 17535


COIL: @ 25°C
 RESISTANCE 160 OHMS ±10%
 NOMINAL VOLTAGE 12 VDC
 MUST OPERATE 6.4 VDC
 MUST RELEASE 0.7 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 2000 Hz @ 20 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
 CONTACT BOUNCE 2.0 MS MAX

CUSTOMER DATA SHEET

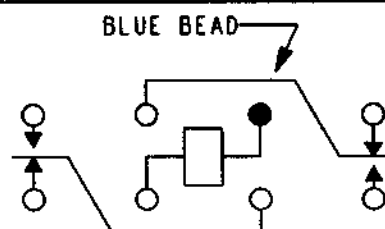

TERMINAL VIEW

CONTACT RATING: 2A 28 VDC
 RESISTIVE, 100,000 OPERATIONS

DR. PBB 10/11/00

CKD 32/26/02

CII Technologies
 advanced control electronic solutions

CUST. C.I.I. STD.

CUST. NO. REV.

"HFW" RELAY

HFW1102G00