
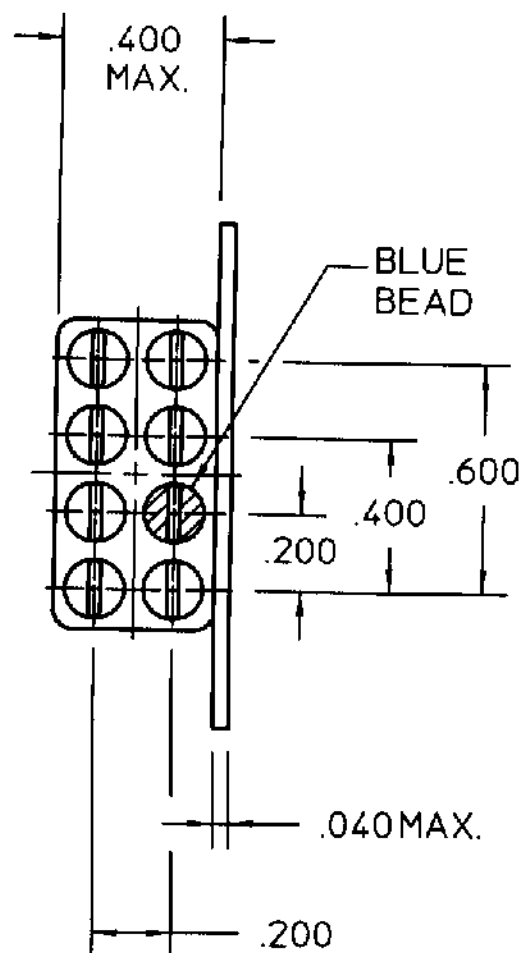


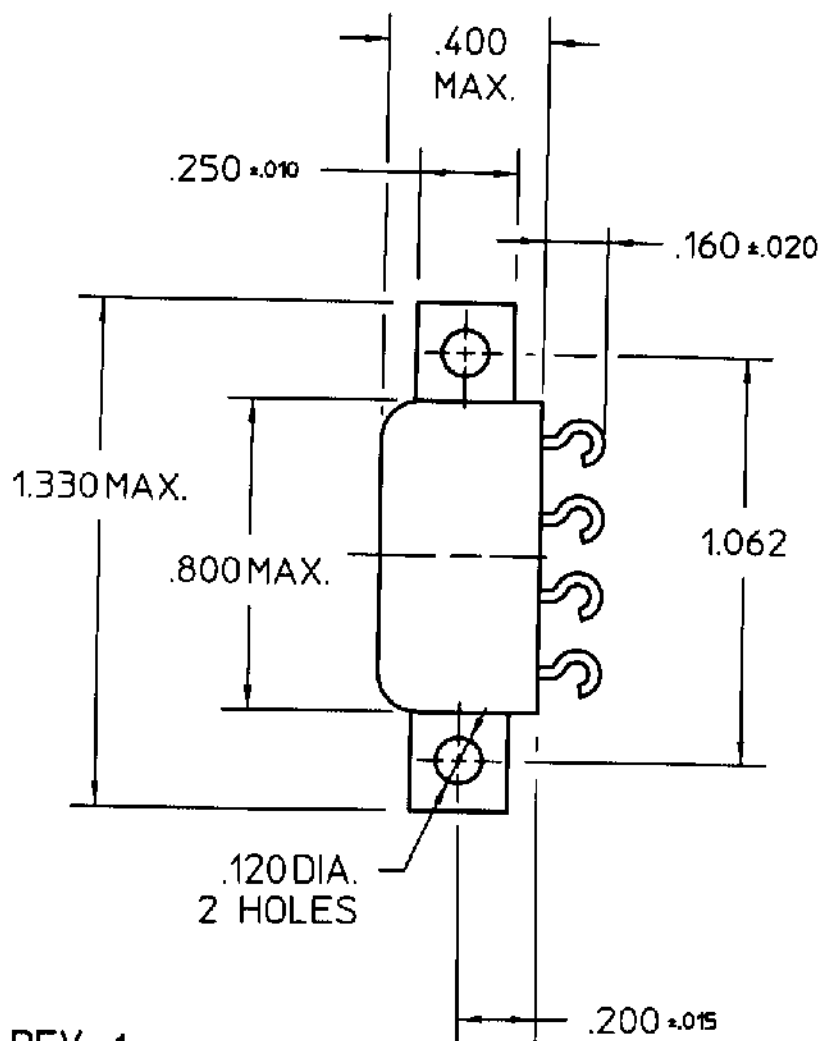

REV. 1

DCO 16187


COIL: @ 25°C
 RESISTANCE 700 OHMS ±10%
 NOMINAL VOLTAGE 20.0 - 30.0 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 8.0 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

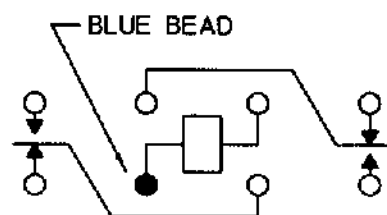

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE 100,000
 OPERATIONS

DR. B.D. 9/20/99

CK. 3/27/00

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. GENICOM
 CUST. NO. 3SAV5042H1 REV.

"HFW" RELAY

HFW1103K09