


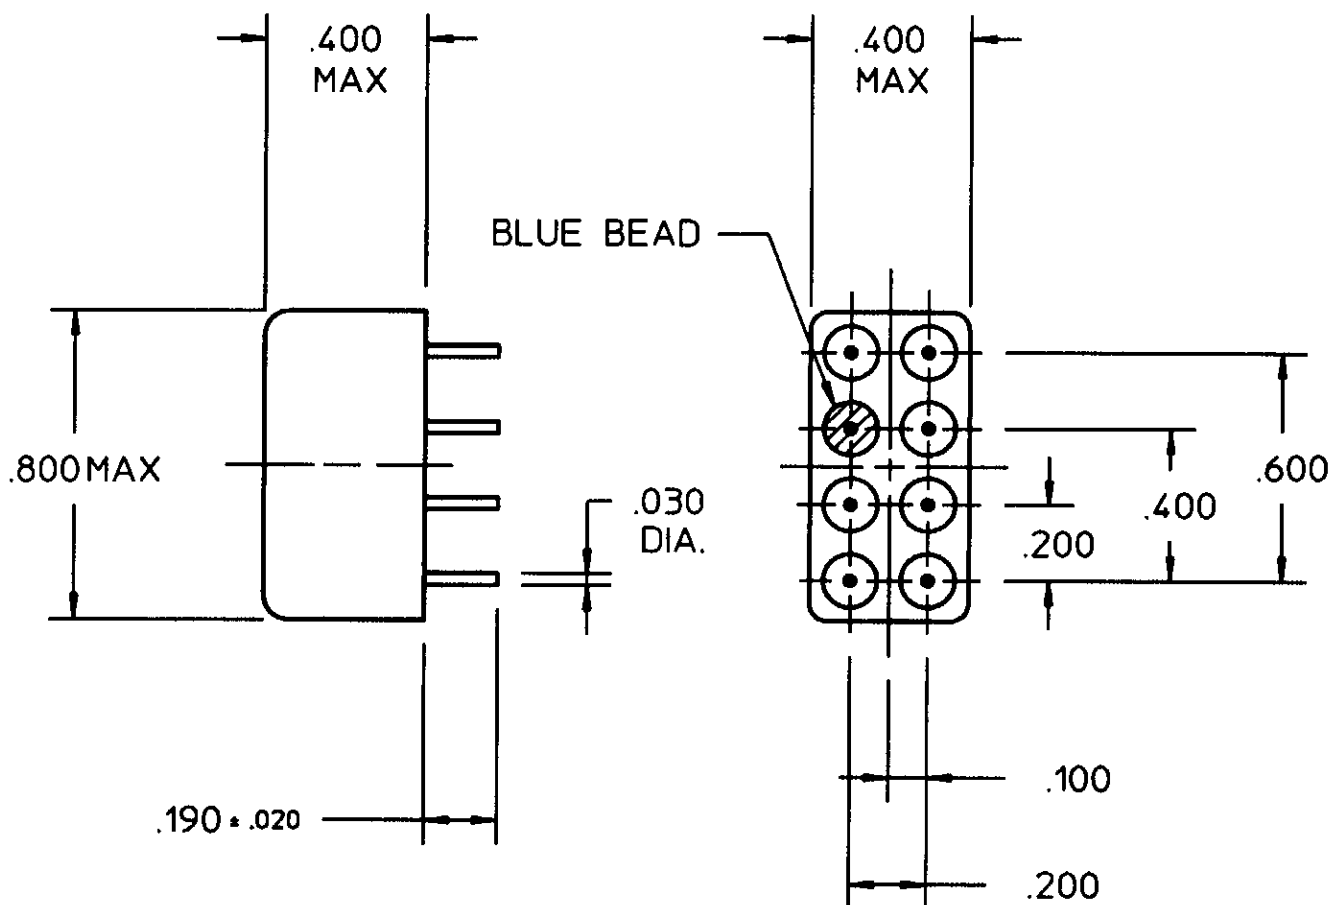


COIL: @ +25 °C
 RESISTANCE 180 OHMS ± 10%
 NOMINAL VOLTAGE 9.5-15.0 VDC
 MUST OPERATE 6.4 VDC
 MUST RELEASE 4.0 VDC MAX 0.7 VDC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX
 CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

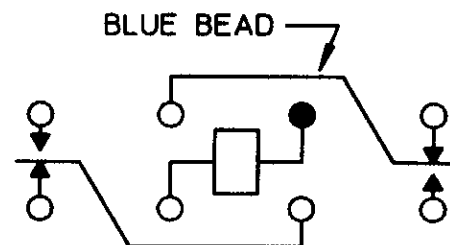

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/22/92 CK. 5/26/92

**COMMUNICATIONS
 INSTRUMENTS, INC.**

CUST. GENICOM
 CUST. NO. 3SAV5004D1

TYPE "HFW" RELAY

HFW1201S246