


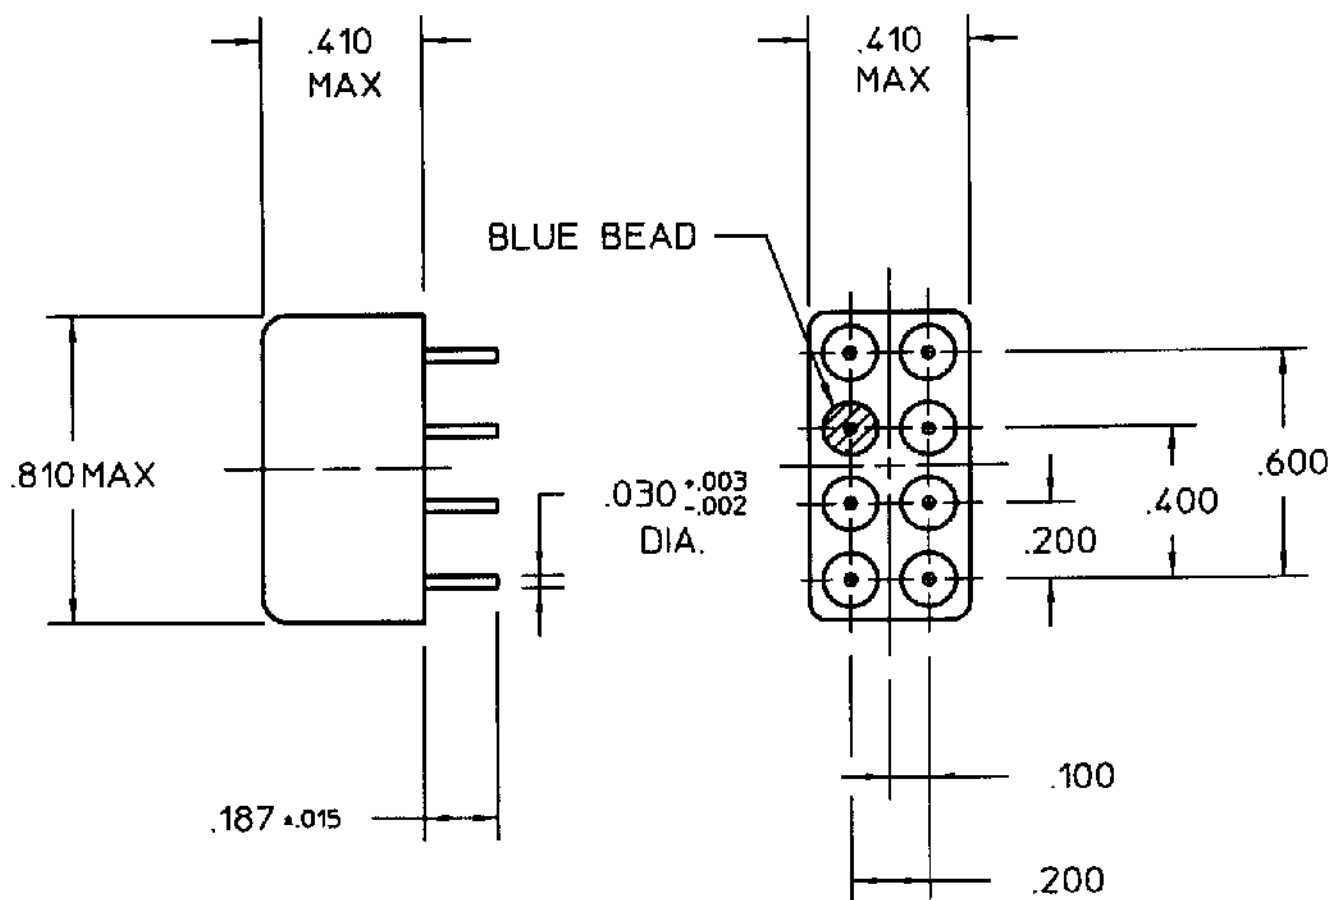

COIL: @ +25 °C

RESISTANCE 400 OHMS ± 10%

NOMINAL VOLTAGE 24.0 VDC

MUST OPERATE 17.0 VDC

MUST RELEASE 1.4 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 500 CPS @ 10 g's


SHOCK 30 g's 6 MS. DURATION

TEMPERATURE -55 °C TO +125 °C

NOTES: OPERATE TIME 5 MS MAX

RELEASE TIME 3 MS MAX

CUSTOMER DATA SHEET

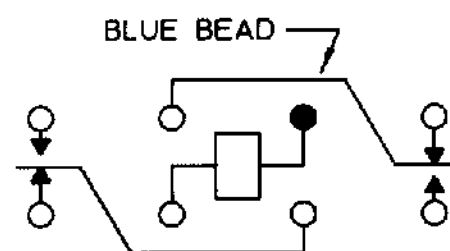

CONTACT RATING: 5A 30 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/19/94 CK. 10/19/94

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. HI-G
CUST. NO. F55-2A-124

TYPE HFW5A RELAY

HFW5A1201S504