


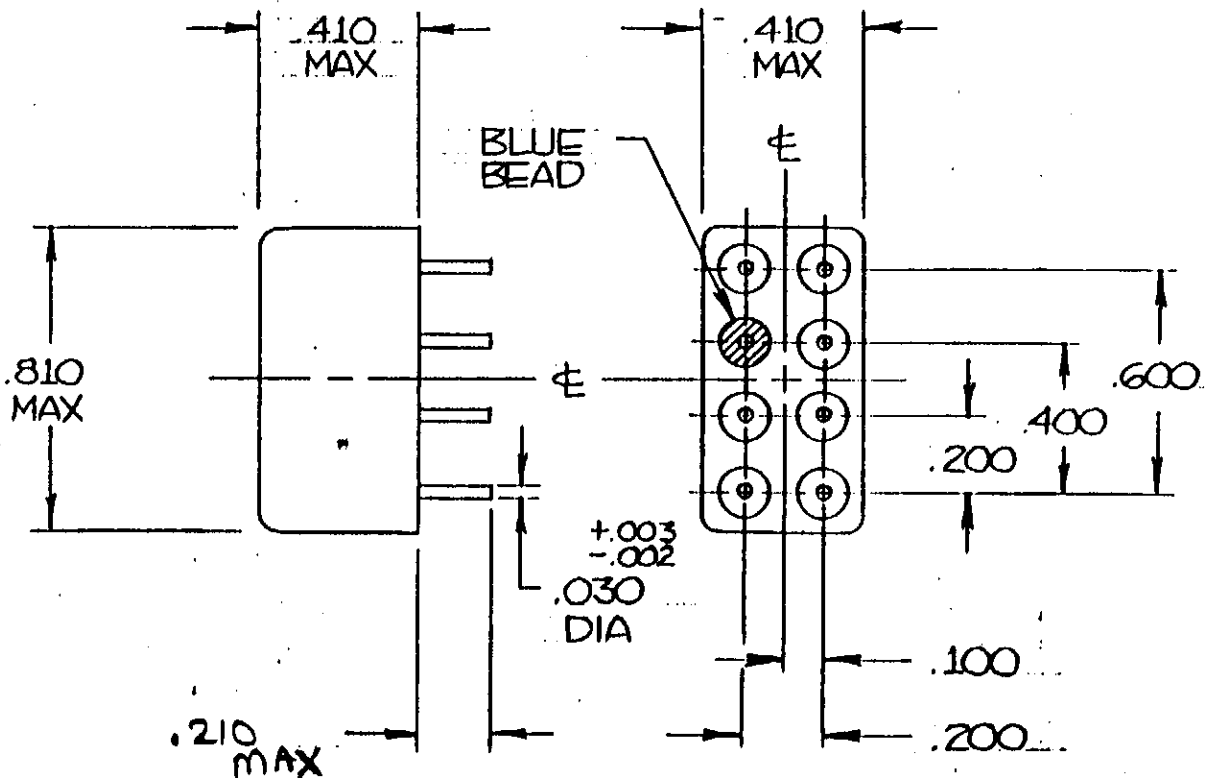

COIL: @ +25°C

RESISTANCE 200 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 6.0 VDC

MUST RELEASE

CUSTOMER DATA SHEET

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 2.0 g's

SHOCK 150 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 3.5 ms MAX

RELEASE TIME 3 ms MAX

CONTACT BOUNCE 1 ms MAX

BLUE BEAD

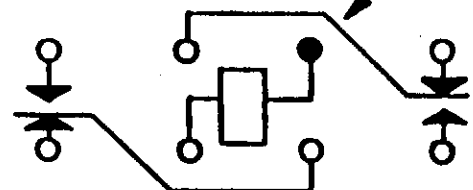

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC 100,000 OPERATIONS

DR. 8/1/91 JAB

CK. 8/1/91 JAB



Communications
Instruments, Inc.

CUST. P+B

CUST. NO. HC-110-12

TYPE HFW RELAY

HFW1201S264