


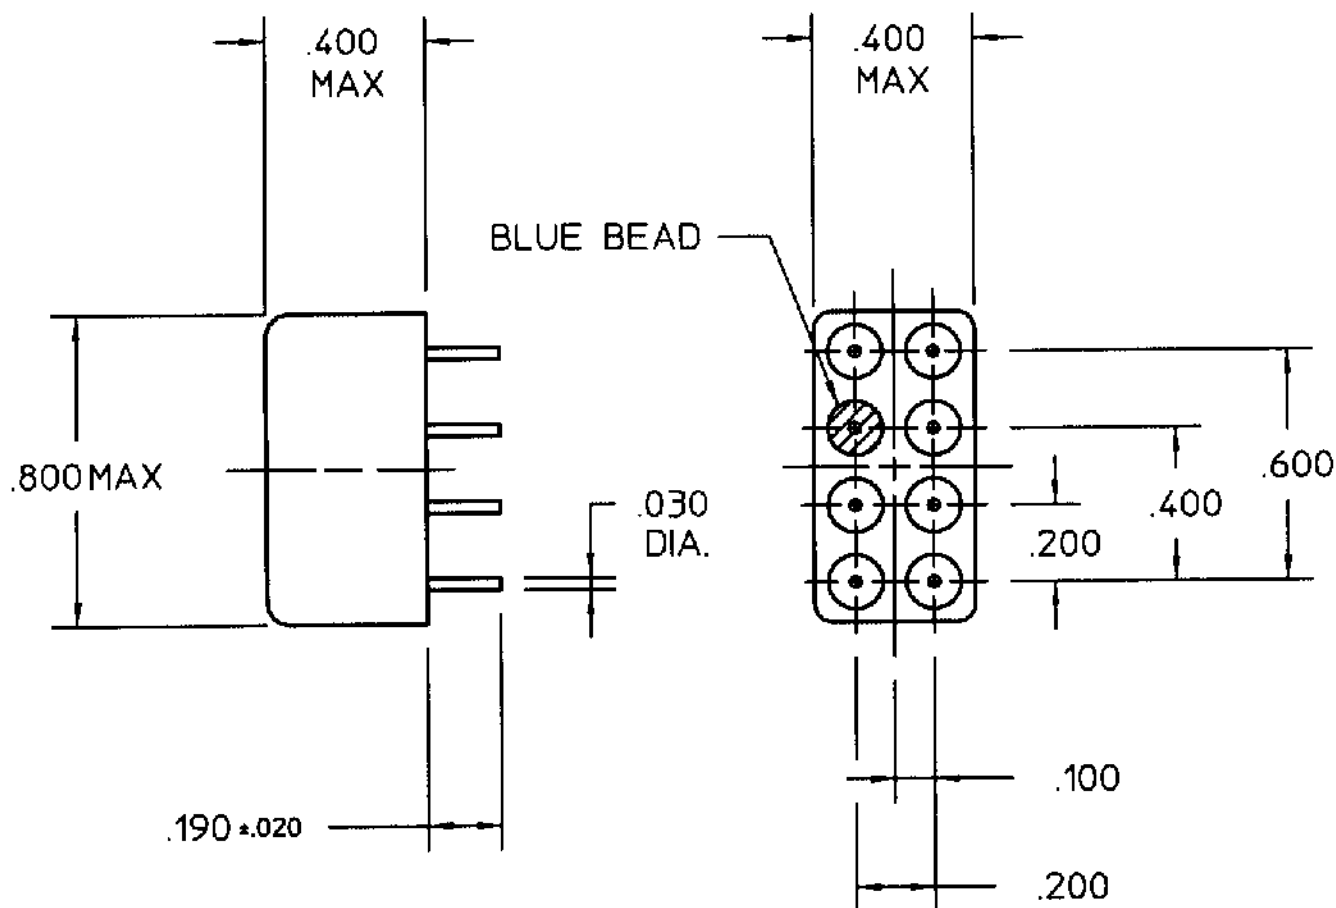

REV. 0
DCO 16189

COIL: @ 25°C
 RESISTANCE 47 OHMS ±10%
 NOMINAL VOLTAGE 3.2 - 7.0 VDC
 MUST OPERATE 2.2 VDC
 MUST RELEASE 1.32 VDC MAX 0.21 VDC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 2500 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX

RELEASE 5 MS MAX

CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

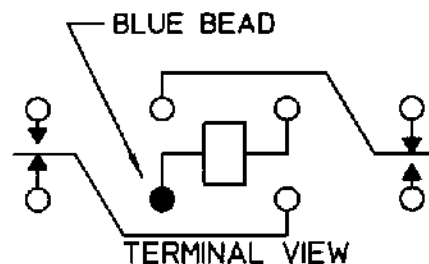

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. P.B.B. 3/29/00

CK. TUG 5-26-00



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. GENICOM
 CUST. NO. 3SAV5004A2 REV.

"HMS" RELAY

HMS1201S121