


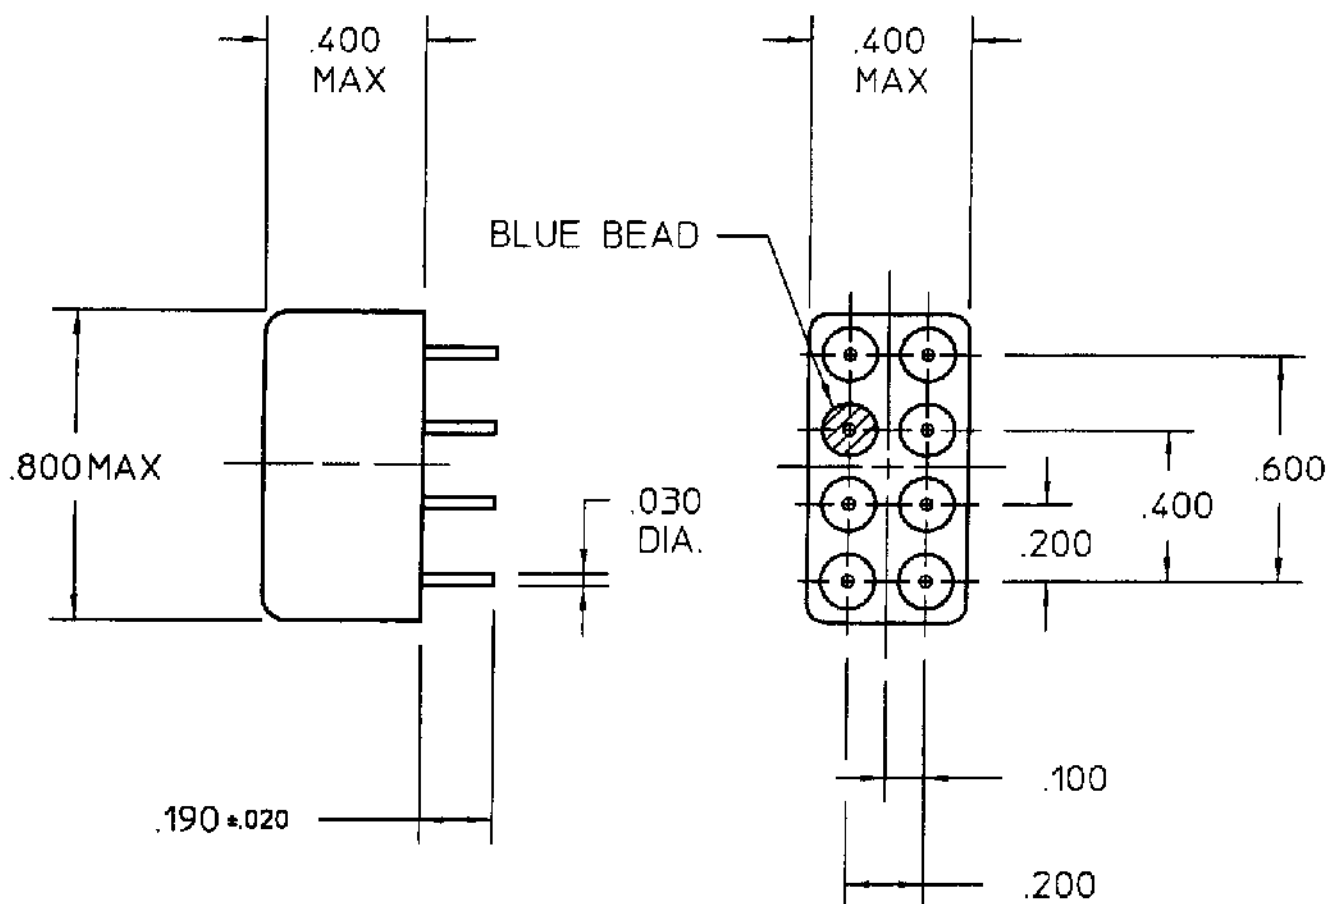


REV. 1
DCO 16676

COIL: @ +25 °C
 RESISTANCE 120 OHMS ± 10%
 NOMINAL VOLTAGE 8.0 VDC
 MUST OPERATE 3.45 VDC
 MUST RELEASE 2.1 VDC MAX 0.35 VDC MIN

ENVIRONMENT:
 VIBRATION 10 CPS TO 2500 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX
 RELEASE 5 MS MAX
 CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

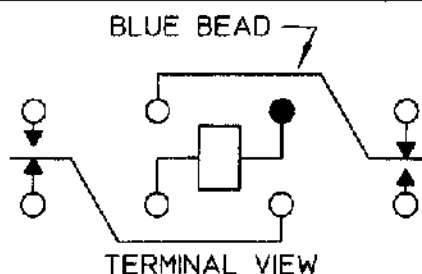

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 1/19/99 CK. TUG 12-14-00

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. GENICOM
 CUST. NO. 3SAV5004C2

TYPE "HMS" RELAY

HMS1201S82