
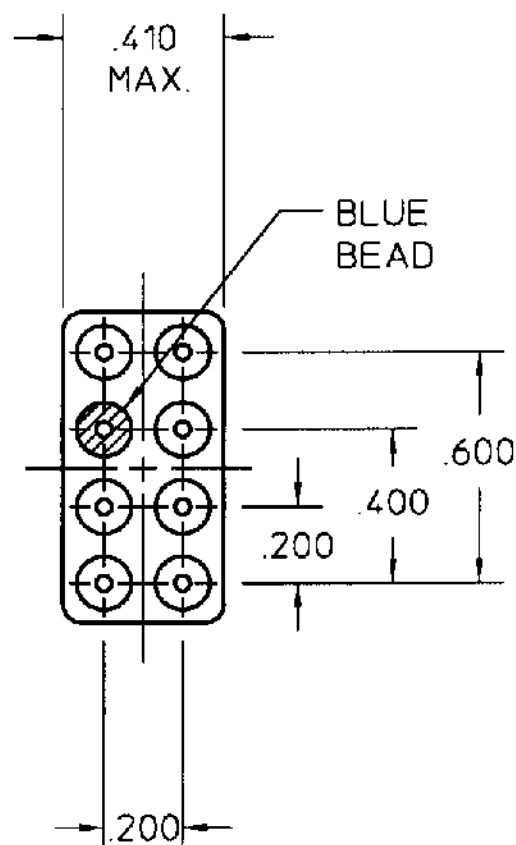


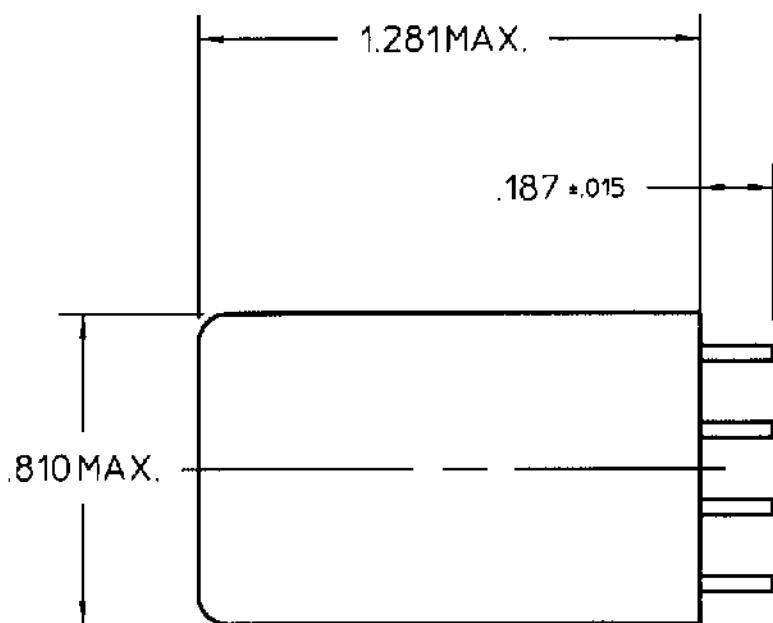

COIL: @ 25°C

RESISTANCE 1000 OHMS ± 10%

NOMINAL VOLTAGE 12.6 VDC

MUST OPERATE 6.5 mADC

MUST RELEASE 0.65 mADC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 100 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX.

RELEASE TIME 7 MS MAX.

CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

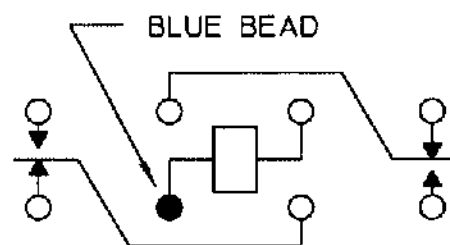

CONTACT RATING: LOW LEVEL TO 2A  
30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/16/98 CK 2/16/98

COMMUNICATIONS  
INSTRUMENTS, INC.

CUST. HI-G  
CUST. NO. 2BC-2A-113

TYPE 'SF' RELAY

SF5201F02