



**intercontec**  
products

# Kontaktstift ø10 mm

Einsatzbereich: - 958 Kupplung / Einbaudose  
Crimp 25 mm<sup>2</sup>

TE Teile Nr.: 61-0114-023-P00  
IC Ref. Nr.: 61.114.23

## Elektrische Werte

Bemessungsstrom max. 118 A\*  
Durchgangswiderstand < 90 µOhm

## Werkstoff

Kontakt Messing, versilbert

## Anschluss

Anschlussart/-bereich Crimp/ 25 mm<sup>2</sup>  
max. Litzenaußendurchmesser ø10,6 mm  
Abisolierlänge 17 mm  
Crimpeinstellungen sind individuell zu wählen


## Mechanische Werte

Steckzyklen 500

## Werkzeuge (nicht im Lieferumfang enthalten)

Akku-Crimpzange TE Teile Nr.: C0-0207-000-000  
IC Ref. Nr.: C0.207.00

(Crimpbacken für 10 mm Kontakt TE Teile Nr.: C0-0010-000-000  
IC Ref. Nr.: C0.010.00)

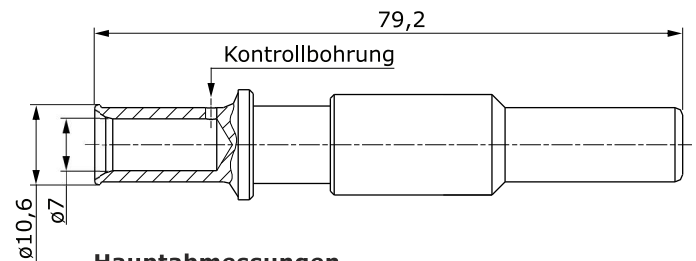

**Hauptabmessungen**  
Kontaktstift





**intercontec**  
products

# Contact Pin $\varnothing 10$ mm

for: - 958 Extension / Receptacle  
crimp 25 mm<sup>2</sup>

TE part number: 61-0114-023-P00  
IC reference number: 61.114.23

## Electrical Data

rated current max. 118 A\*  
contact resistance < 90  $\mu$ Ohm

## Material

contact brass, silver plated

## Termination

cross-section crimp/ 25 mm<sup>2</sup>  
max. outer wire diameter  $\varnothing 10.6$  mm  
stripping length 17 mm  
crimp settings select individually


## Mechanical Data

mating cycles 500

## Tools (not part of product contents)

battery crimp tool TE part no.: C0-0207-000-000  
IC ref. no.: C0.207.00

(crimping insert for 10 mm contact TE part no.: C0-0010-000-000  
IC ref. no.: C0.010.00)

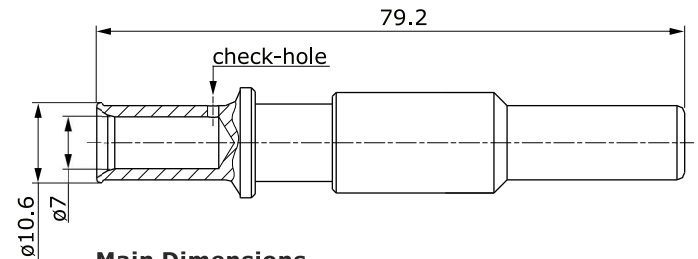

## Main Dimensions

contact pin

