


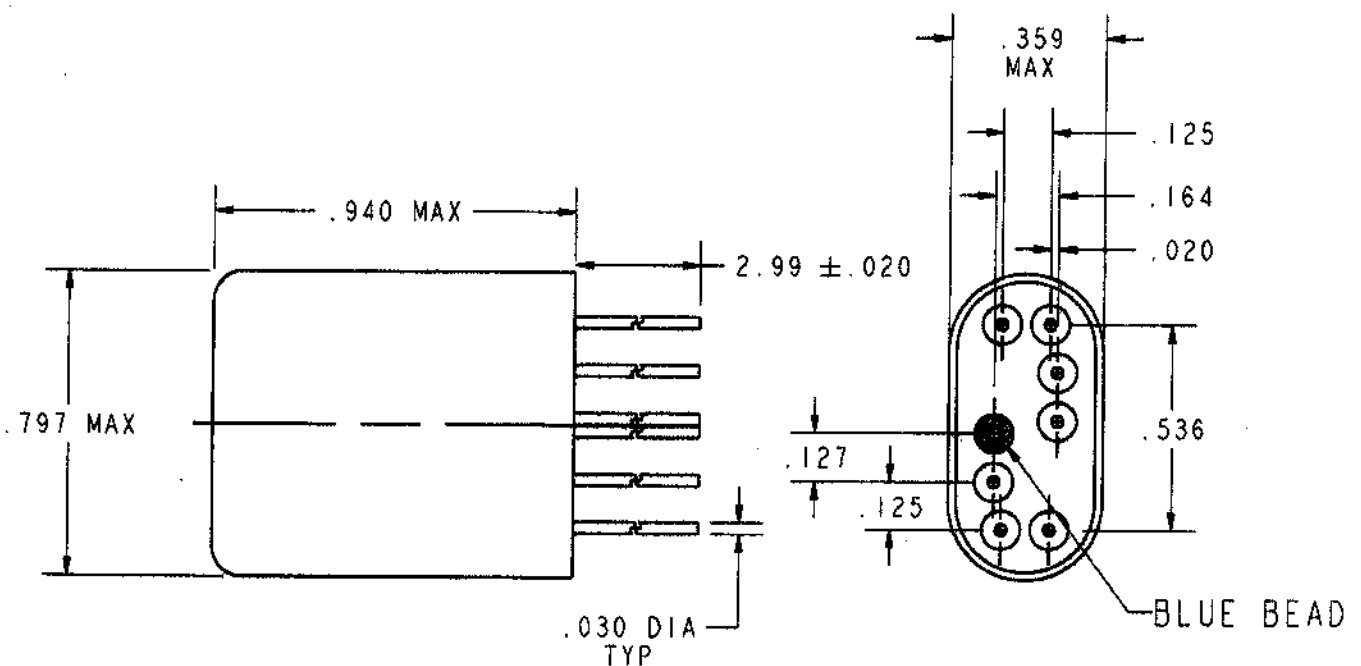

REV. 0

DCO 170585


COIL: @ 25°C
 RESISTANCE 552 OHMS MAX.
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 7.0 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX.
RELEASE 5 MS MAX. BOUNCE 2.5 MS

CUSTOMER DATA SHEET

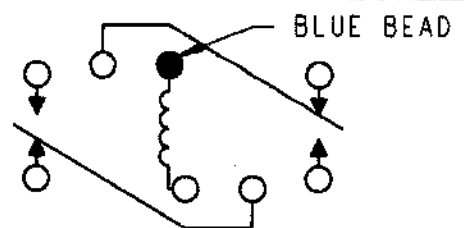

TERMINAL VIEW

CONTACT RATING: 2 AMPS 28 VDC 1 AMP 115 VAC
 (CASE NOT GROUNDED)
 RESISTIVE 100,000 OPERATIONS

DR. ASB 10/17/01 CK. TLG 10-17-01

CII Technologies
 advanced control electronic solutions

CUST. CII STD
 CUST. NO. REV.

3SAE RELAY

3SAE5008K1