


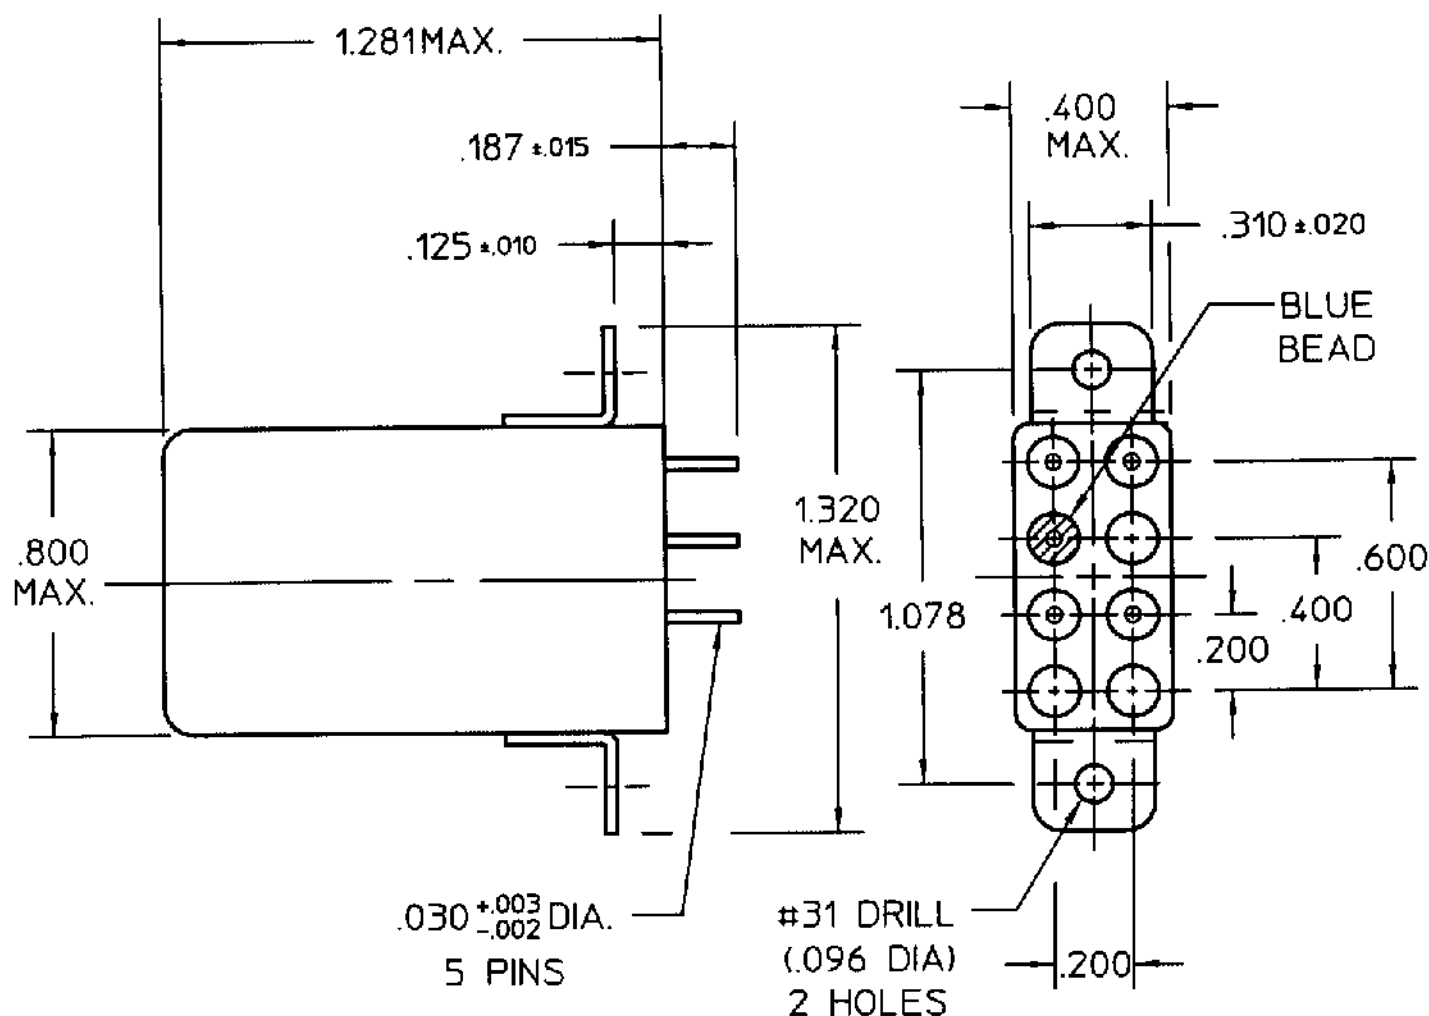

REV. 2

DCO 15851

COIL: @ 25°C
 RESISTANCE 20 OHMS ±10%
 NOMINAL VOLTAGE 1.4 VDC
 MUST OPERATE 35.3 mADC
 MUST RELEASE 3.5 mADC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C


NOTES: OPERATE TIME 15 MS MAX.

RELEASE TIME 10 MS MAX.

CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

BLUE BEAD

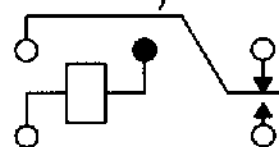

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
 30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/5/92 CK. GAH 10/8/99

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. HI-G
 CUST. NO. 1BC-2E-101 REV.

'SF' RELAY

SF5605A01