

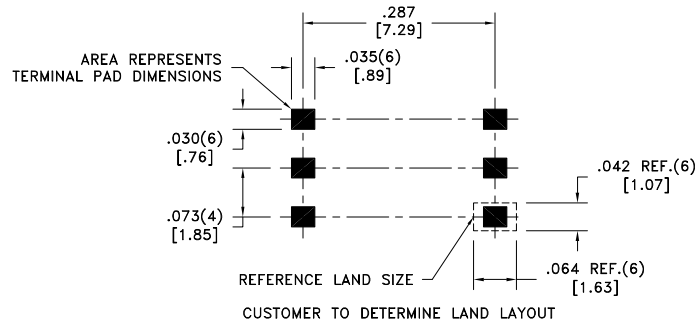



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

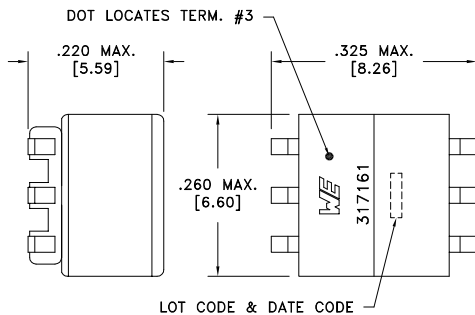

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	1.580 ohms ±10%
D.C. RESISTANCE	4-6 @20°C	8.120 ohms ±10%
INDUCTANCE	4-6 58kHz, 1.0VAC, Ls	3.00mH ±10%
DIELECTRIC	3-4 500VAC, 1 second	500VAC, 1 minute
URNS RATIO	(4-6):(2-1)	8.42:1, ±1%
URNS RATIO	(2-1):(3-2)	1:1, ±1%


GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety standard undefined.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications
		Method: Tape & Reel
		PKG-0637
		www.we-online.com/midcom
6A	12/17	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:
Angles: ±1°
Fractions: ±1/64
Decimals: ±.005 [.13]
Footprint: ±.005 [.13]
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750317161



PART NO.
750317161
SPECIFICATION SHEET 1 OF 1