

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect





ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.520 ohms max.
D.C. RESISTANCE	2-3 @20°C	0.520 ohms max.
D.C. RESISTANCE	7-6 @20°C	0.025 ohms max.
INDUCTANCE	7-6 10kHz, 100mVAC, Ls	20.00uH min.
LEAKAGE INDUCTANCE	7-6 tie(1+2+3), 100kHz, 100mVAC, Ls	180.0nH max.
DIELECTRIC	1-7 3000VAC, 1 second	-
⑥C TURNS RATIO	(1-2):(7-6)	3.2:1
⑥C TURNS RATIO	(2-3):(7-6)	3.2:1

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

⑥C VOLTAGE-TIME: 16VuS

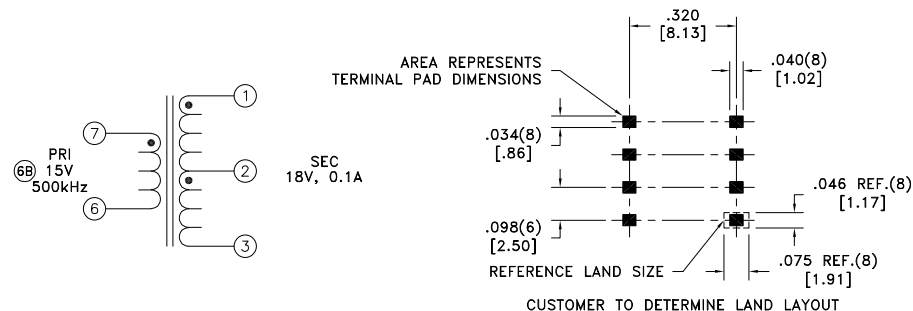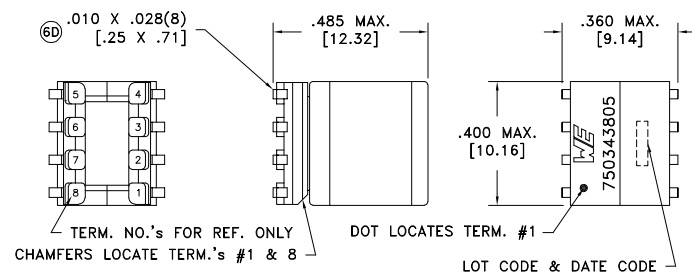

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$	Decimals: $\pm .005$ [.13] Footprint: $\pm .005$ [.13]	DRAWING TITLE	PART NO.
6D	2/23	Method: Tape & Reel				TRANSFORMER	750343805
6C	2/22	PKG-0409					
6B	10/18	www.we-online.com/midcom					
6A	8/18	SEE REVISION SHEET FOR REVISION LEVEL					
				This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		eiSos p/n: 750343805	SPECIFICATION SHEET 1 OF 1

