
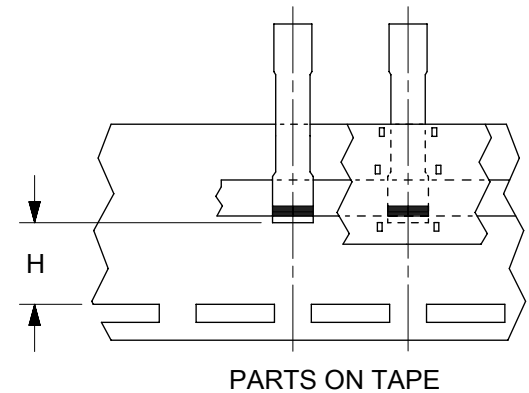


6		5		4		3		2		1		
LOOSE PIECE		TAPE MOUNTED		INSULATION COLOR (REF)	CODE STRIPE COLOR (REF)	"A"		"B"		MWID	"L" ±.025/0.64	"H" ±.03/0.8
MAT'L NO.	ENG'G NO.	MAT'L NO.	ENG'G NO.			AWG	MIN DIA	AWG	MIN DIA			
191540022	BA-631X	191540057	BA-631XT	BLUE	RED	22-18	.065/1.65	16/14	.088/2.24	.17/4.3	1.08/27.4	.42/10.7
191540035	CB-646X	191540036	CB-646XT	YELLOW	BLUE	16-14	.091/2.31	12-10	.137/3.48	.26/6.6	1.30/33.0	.35/8.9
191540044	DC-654X	191540043	DC-654XT	RED	YELLOW	12-10	.138/3.51	#8	.165/4.19	.33/8.4	1.50/38.1	-
191540047	ED-662X	-	-	BLUE	RED	#8	.175/4.45	#6	.222/5.64	.43/10.9	1.84/46.7	-

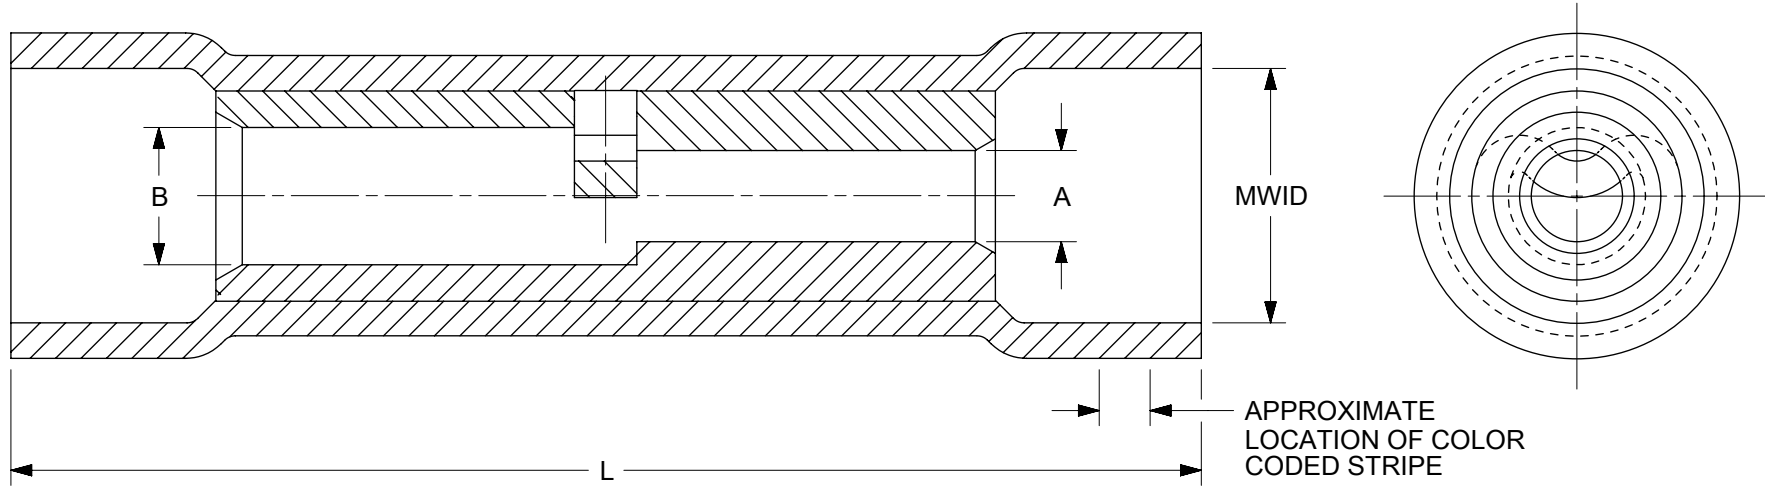

SALES DRAWING

- NOTES:
- MATERIALS:
SPLICE: MATTE-TIN PLATED COPPER
INSULATION: PVC, COLOR PER CHART
 - MWID = MAXIMUM WIRE INSULATION DIAMETER
 - MUST BE RoHS COMPLIANT

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: CORRECTED TYPO			molex							
	INCH/MM		1:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
		MM	INCH												
	E/A=0	4 PLACES	±	±				EC NO: 753565 DRWN: DEANNM1 2023/06/15 CHK'D: JMACNEIL 2023/06/15 APPR: JMACNEIL 2023/06/15			STEP DOWN BUTT SPLICE INSULKRIMP				
	E/C=0	3 PLACES	±	±											
	E/P=0	2 PLACES	±	±											
	DIVISIONAL SYMBOLS	1 PLACE	±	±	INITIAL REVISION: DRWN: RCM 1991/10/28 APPR: JMACNEIL 2011/04/27						DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
		0 PLACES	±	±							SD-19154-007		PSD	001	A3
ANGULAR TOL		±	°												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER					
					A-SIZE	19154		GENERAL MARKET		1 OF 1					