

PRODUCT DATA DRAWING

CAD
GENERATED
DRAWING

DCN
CONTROLLED
DOCUMENT

DWG. NO.

SF2998-6001

MATERIAL:


BODY
COUPLING NUT: STAINLESS STEEL PER AMS-5640,
UNS S30300, TYPE I.

LOCK RING: BERYLLIUM COPPER PER ASTM B196.

GASKET: SILICONE RUBBER PER ZZ-R-765, CLASS II,
GRADE 50/60

FINISH:

BODY
COUPLING NUT: PASSIVATED PER QQ-P-35, TYPE II

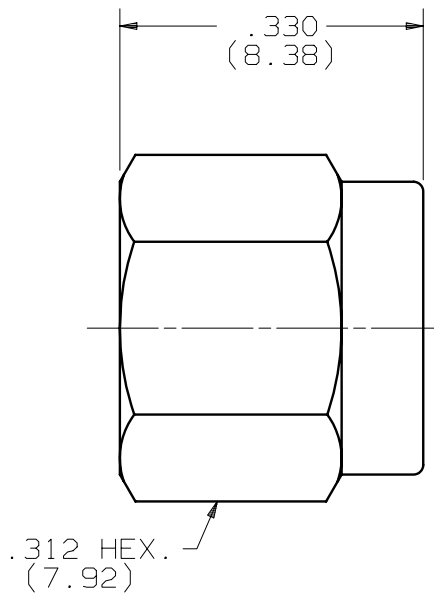

SYM.	DESCRIPTION	DATE	APPR.	UNLESS OTHERWISE SPECIFIED: 1)ALL DIMENSIONS ARE AFTER PLATING. 2)BREAK CORNERS & EDGES .005 R.MAX. 3)CHAM. 1st & LAST THDS. 4)SURFACE ROUGHNESS 63 / MIL-STD-10. 5)DIAS. ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6)REMOVE ALL BURRS.		DIMENSIONS ARE IN INCHES TOLERANCES: DECIMALS .X ±.030 .XX ±.015 .XXX ±.005			FRACTIONAL ANGULAR ±1/64 X° ±1°0' X°X' ±15'		SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409 TITLE: SMA PLUG NON SHORTING DUST CAP DWG. NO. SF2998-6001			
B	REL. DCN 32690	02/05	VMJ			MATERIAL: SEE ABOVE			FINISH: SEE ABOVE				AREA: N/A	
				DRAWN: MEB 02/02/05										
				CHECKED: VMJ 02/02/05		SIZE A			CAGE NO. 95077				SCALE N/A	
				APPROVED: VMJ 02/02/05										