

G3VM-61PR

MOS FET Relays

Smallest Class in market, USOP Package
MOS FET Relays (C_{OFF} (typical): 20 pF,
R_{ON} (typical): 1 Ω) with Low Output
Capacitance and ON Resistance (C × R =
20 pF • Ω) in a 60-V Load Voltage Model.

• ON resistance of 1 Ω (typical) suppresses output signal attenuation.



NEW



Note: The actual product is marked differently from the image shown here.

RoHS compliant

Application Examples

- Semiconductor test equipment
- Test & Measurement equipment
- Communication equipment
- Data loggers

Terminal Arrangement/Internal Connections



Note: The actual product is marked differently from the image shown here.

List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity
					Number per tape and reel
USOP4	1a (SPST-NO)	Surface-mounting Terminals	60 V	G3VM-61PR	-
				G3VM-61PR (TR05)	500
				G3VM-61PR (TR)	1,500

Note: Ask your OMRON representative for orders under 1,500 pcs or 500 pcs. We can supply products with the tape already cut.

Tape-cut USOPs are packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

* The AC peak and DC value are given for the load voltage.

Absolute Maximum Ratings (T_a = 25 °C)


Item		Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	I _F	50	mA	
	LED forward current reduction rate	ΔI _F /°C	-0.5	mA/°C	T _a ≥ 25 °C
	LED reverse voltage	V _R	5	V	
	Connection temperature	T _J	125	°C	
Output	Load voltage (AC peak/DC)	V _{OFF}	60	V	
	Continuous load current (AC peak/DC)	I _O	400	mA	
	ON current reduction rate	ΔI _O /°C	-4.0	mA/°C	T _a ≥ 25 °C
	Connection temperature	T _J	125	°C	
Dielectric strength between I/O (See note 1.)		V _{I-O}	500	V _{rms}	AC for 1 min
Ambient operating temperature		T _a	-40 to +85	°C	With no icing or condensation
Ambient storage temperature		T _{stg}	-40 to +125	°C	With no icing or condensation
Soldering temperature		-	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (T_a = 25 °C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V _F	1.0	1.15	1.3	V	I _F = 10 mA
	Reverse current	I _R	-	-	10	μA	V _R = 5 V
	Capacity between terminals	C _T	-	15	-	pF	V = 0, f = 1 MHz
	Trigger LED forward current	I _{FT}	-	0.5	3	mA	I _O = 100 mA
Output	Maximum resistance with output ON	R _{ON}	-	1.0	1.5	Ω	I _F = 5 mA, I _O = 400 mA, t < 1 s
	Current leakage when the relay is open	I _{LEAK}	-	-	1	nA	V _{OFF} = 60 V, T _a = 25 °C
	Capacity between terminals	C _{OFF}	-	20	30	pF	V = 0, f = 1 MHz, t < 1 s
	Capacity between I/O terminals	C _{I-O}	-	0.3	-	pF	f = 1 MHz, V _s = 0 V
Insulation resistance between I/O terminals		R _{I-O}	1000	-	-	MΩ	V _{I-O} = 500 VDC, RoH ≤ 60 %
Turn-ON time		t _{ON}	-	0.3	0.5	ms	I _F = 5 mA, R _L = 200 Ω, V _{DD} = 20 V (See note 2.)
Turn-OFF time		t _{OFF}	-	0.3	0.5	ms	

Note: 2. Turn-ON and Turn-OFF Times




Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	-	-	48	V
Operating LED forward current	I_F	5	7.5	20	mA
Continuous load current (AC peak/DC)	I_O	-	-	400	mA
Ambient operating temperature	T_a	-20	-	65	°C

Engineering Data


LED forward current vs. Ambient temperature

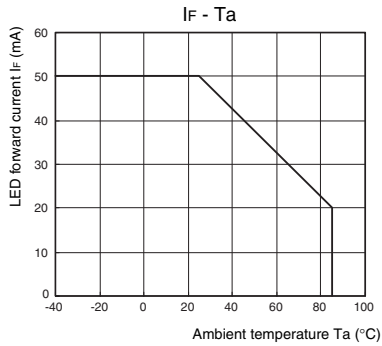


Continuous load current vs. Ambient temperature

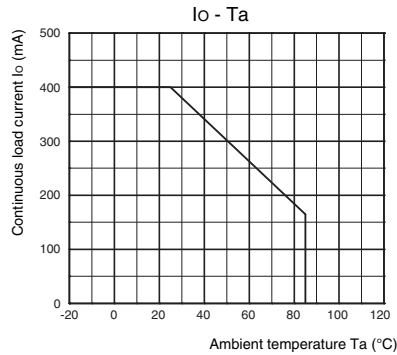


LED forward current vs. LED forward voltage

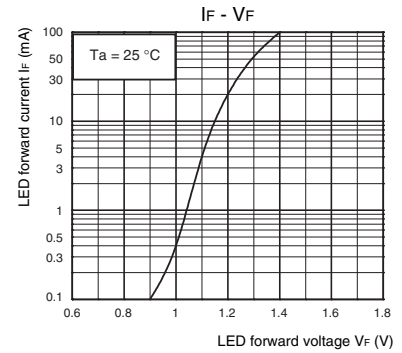


Continuous load current vs. On-state voltage

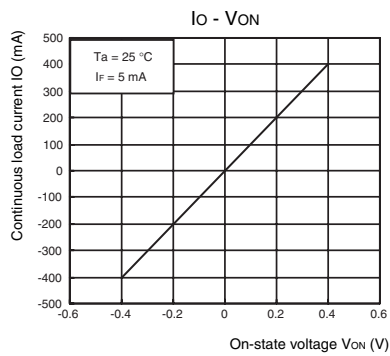


On-state resistance vs. Ambient temperature

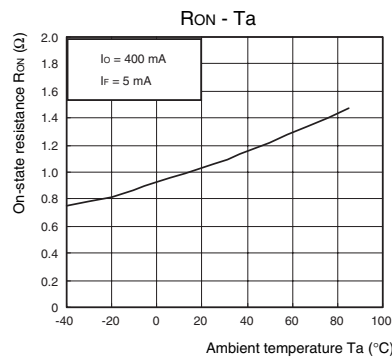


Trigger LED forward current vs. Ambient temperature

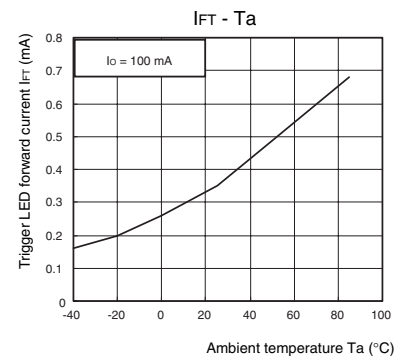


Turn ON, Turn OFF time vs. LED forward current

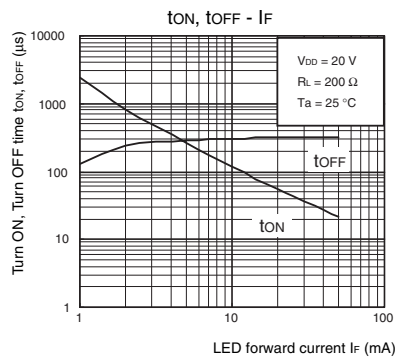


Turn ON, Turn OFF time vs. Ambient temperature

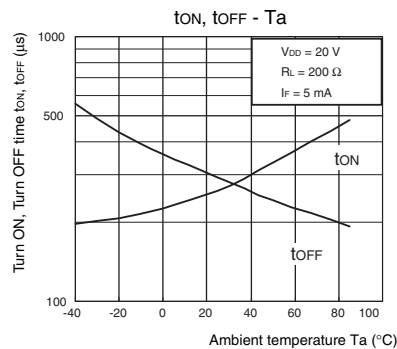

Current leakage vs. Load voltage

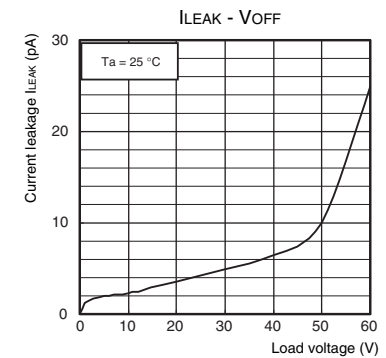

Output terminal capacitance vs. load voltage

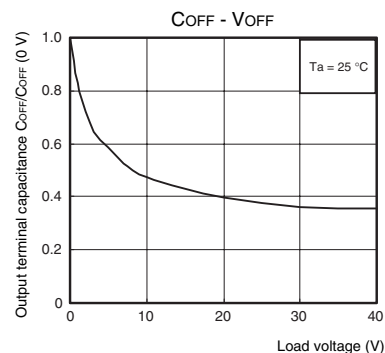


Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

■ Appearance

USOP (Ultra Small Outline Package)
USOP4




Note: The actual product is marked differently from the image shown here.

■ Dimensions

(Unit: mm)




Surface-mounting Terminals
Weight: 0.03 g



Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. K211-E1-01
0412(0412)(O)