
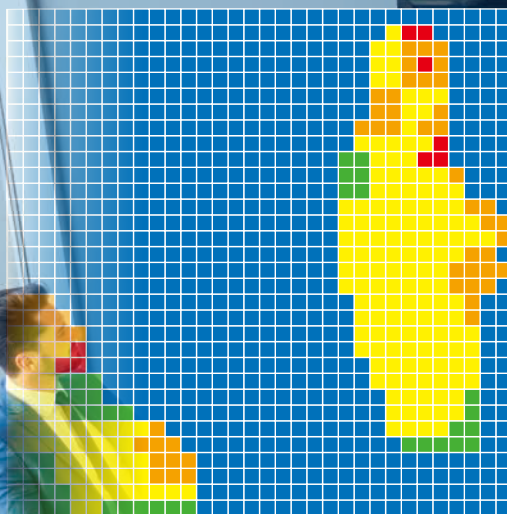
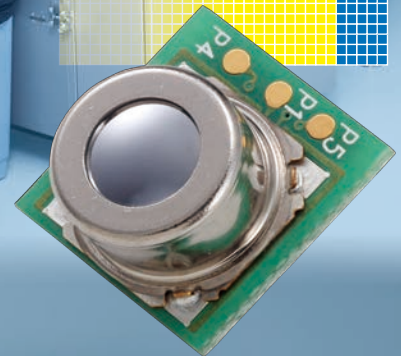




## D6T MEMS Thermal Sensors

Contactless measurement with OMRON  
D6T Thermal Sensors  
Able to detect the slightest  
temperature changes

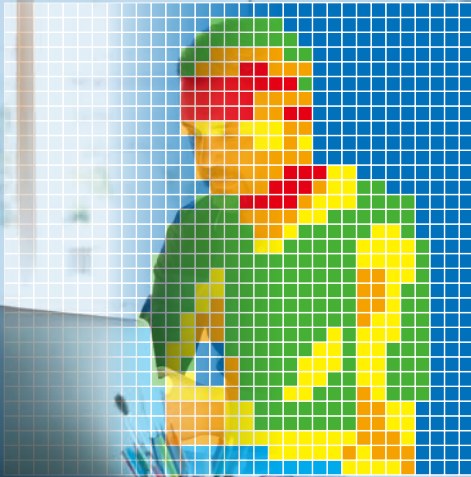

# Contactless Measurement OMRON MEMS Thermal Sensors are able to detect the slightest temperature changes

MEMS Thermal (IR sensor) measures the surface temperature of objects without touching them when the thermopile element absorbs the amount of radiant energy from the object.

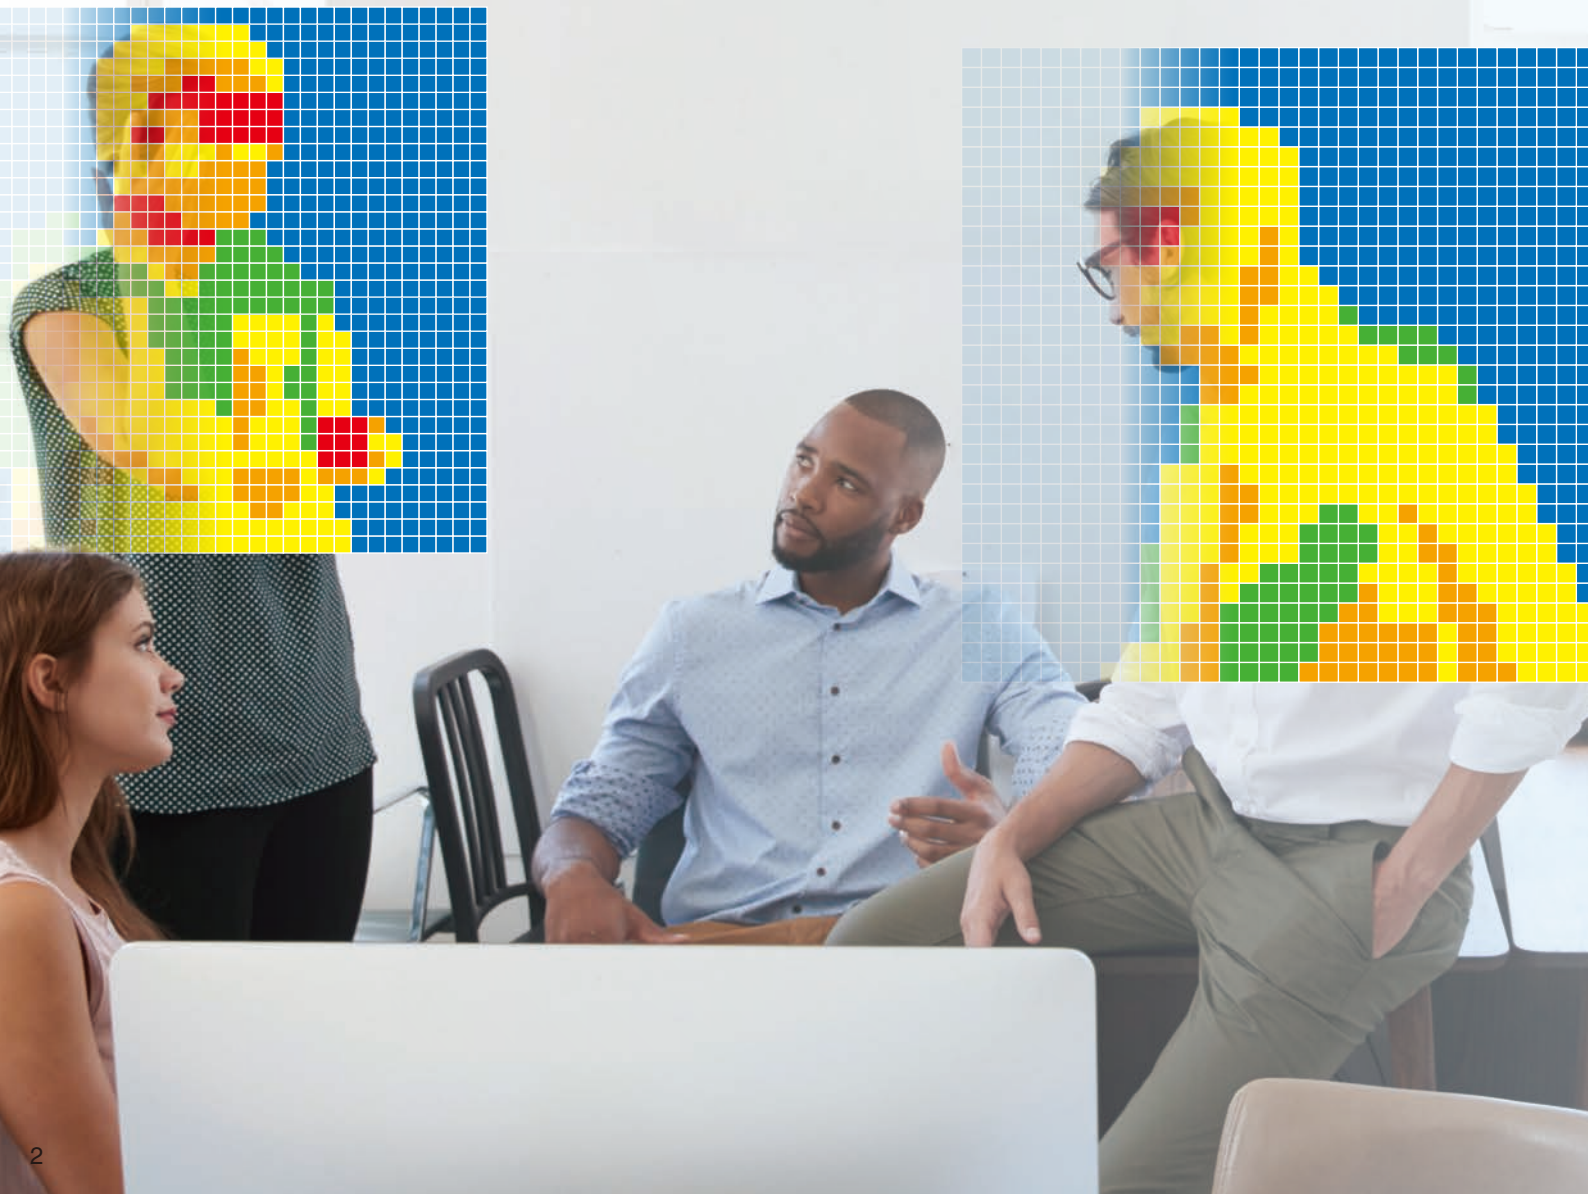





1

## Low noise

**World's highest-class stable temperature output\***

\*According to OMRON's research as of February 2021, except for D6T-32L-01A.

2

## Easy connection

**Direct temperature value output allows easy software design**

3

## Number of elements and temperature lineup

**Variation of the number of elements (1 to 1024) x temperature range (-40 to 200°C)**

1

# High Precision

## World's highest-class stable temperature output\*


\*According to OMRON's research as of February 2021, except for D6T-32L-01A.

### Past problem


Output was unstable in applications requiring high precision

### Solution!


Stable temperature output

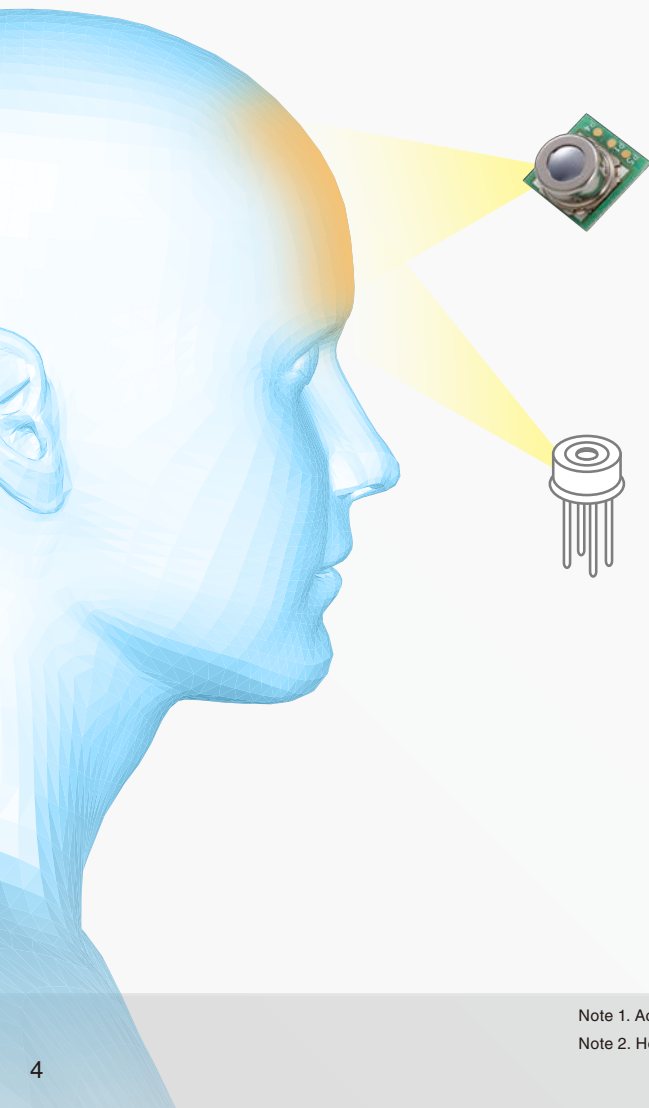

OMRON D6T-1A-01

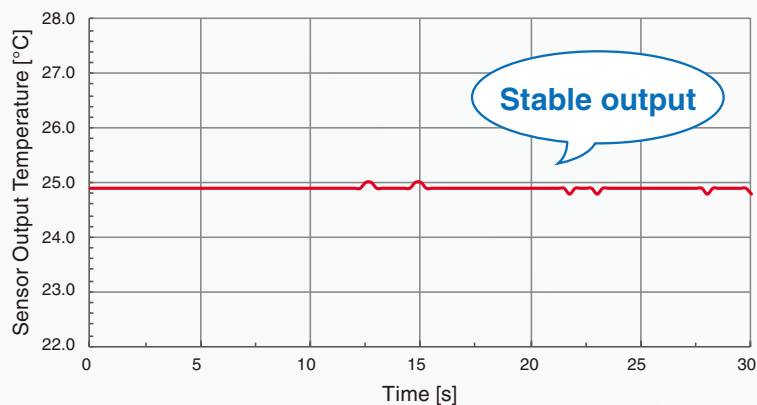

Standard Equivalent Product


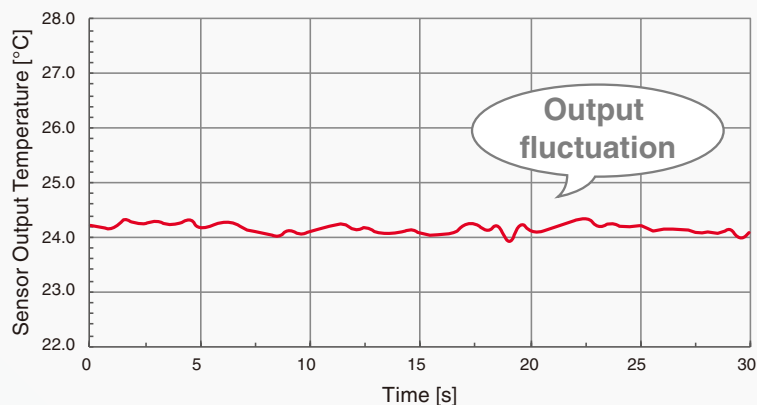


Note 1. According to OMRON's evaluation method (30-second continuous measurement with a blackbody furnace at 25°C)

Note 2. However, product specifications are not guaranteed.

## -High Precision- Why?

Achieves the world's highest level\*<sup>2</sup> of SNR\*<sup>1</sup>  
by combining the in-house designed and  
manufactured ASIC and MEMS

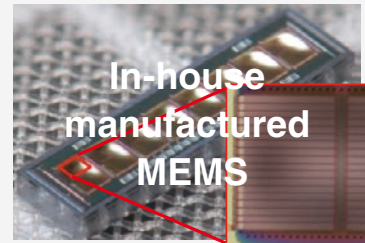


OMRON designs and manufactures both ASIC and MEMS thermopiles in-house.  
OMRON's unique digital filter and process optimization reduce the noise of  
ASIC, achieving the world's highest-level SNR.

\*1 SNR: Signal-to-Noise Ratio. Compares the level of a signal to the level of background noise.


\*2 According to OMRON's research as of February 2021, except for D6T-32L-01A.

## Product Structure

OMRON's unique MEMS technology allows combining thermopile elements and ASICs into one package, resulting in ultra-compact footprint and high precision.

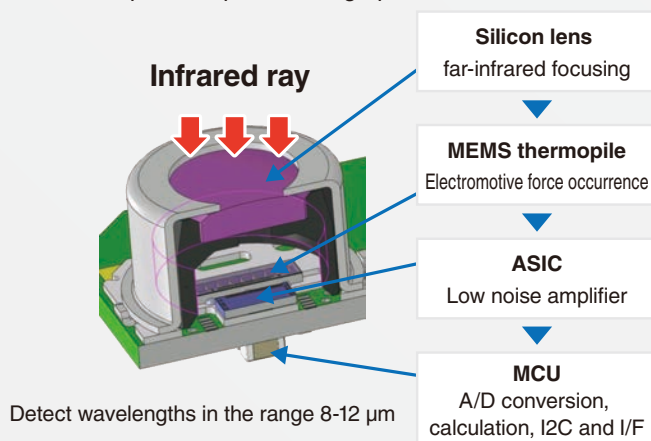

## MEMS thermopile detection principle

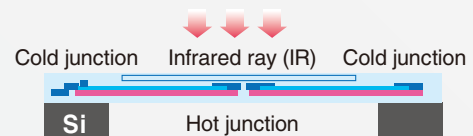


The sensor utilizes the seebeck effect in which thermoelectric force is generated due to the temperature difference that occurs across the junction points of two different types of metal.

## 2


# Easy connection

Direct temperature value output allows easy software design

## OMRON D6T




Temperature  
value output

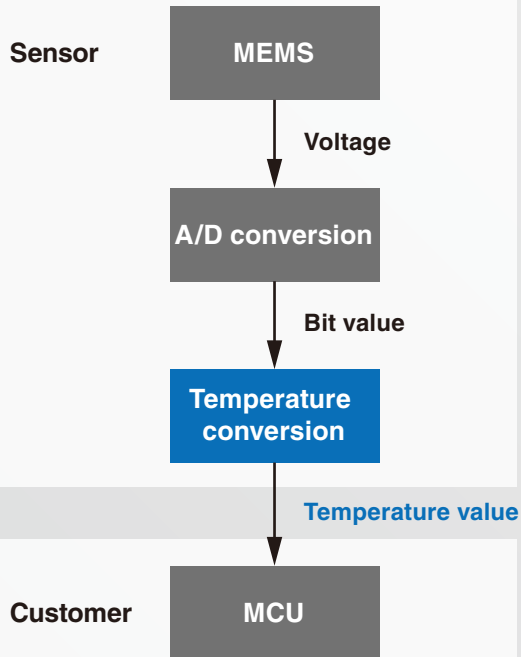

## CAN packaged thermal sensor from a competitor



Bit value output

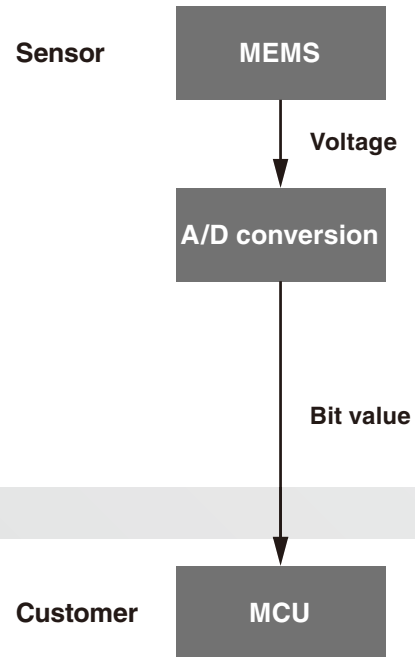

### Provision of Development Support Tool

MEMS thermal sensors can be connected to [OMRON sensor evaluation boards](#).

The below 3 types of platform are applicable. Evaluation can be performed easily by connecting thermal sensor, evaluation board, and harness to the platform.


| Sensor | Harness for Connection | Evaluation Board | Platform                    | Sample Code                                                                                                                       |
|--------|------------------------|------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| D6T    | 2JCIE-HARNESS-01       | 2JCIE-EV01-RP1   | Raspberry Pi <sup>*1</sup>  | <a href="https://github.com/omron-devhub/d6t-2jcieev01-raspberrypi">https://github.com/omron-devhub/d6t-2jcieev01-raspberrypi</a> |
|        |                        | 2JCIE-EV01-AR1   | Arduino <sup>*2</sup>       | <a href="https://github.com/omron-devhub/d6t-2jcieev01-arduino">https://github.com/omron-devhub/d6t-2jcieev01-arduino</a>         |
|        |                        | 2JCIE-EV01-FT1   | ESP32 Feather <sup>*3</sup> | <a href="https://github.com/omron-devhub/d6t-2jcieev01-arduino">https://github.com/omron-devhub/d6t-2jcieev01-arduino</a>         |

<sup>\*1</sup>. Raspberry Pi is a registered trademark of the Raspberry Pi Foundation. <sup>\*2</sup>. Arduino is a registered trademark of Arduino LLC and Arduino SRL. <sup>\*3</sup>. Feather is a registered trademark of Adafruit Industries LLC.

# 3


## Number of elements and temperature lineup

Variation of the number of elements (1 to 1024) and the temperature range (-40 to 200°C)

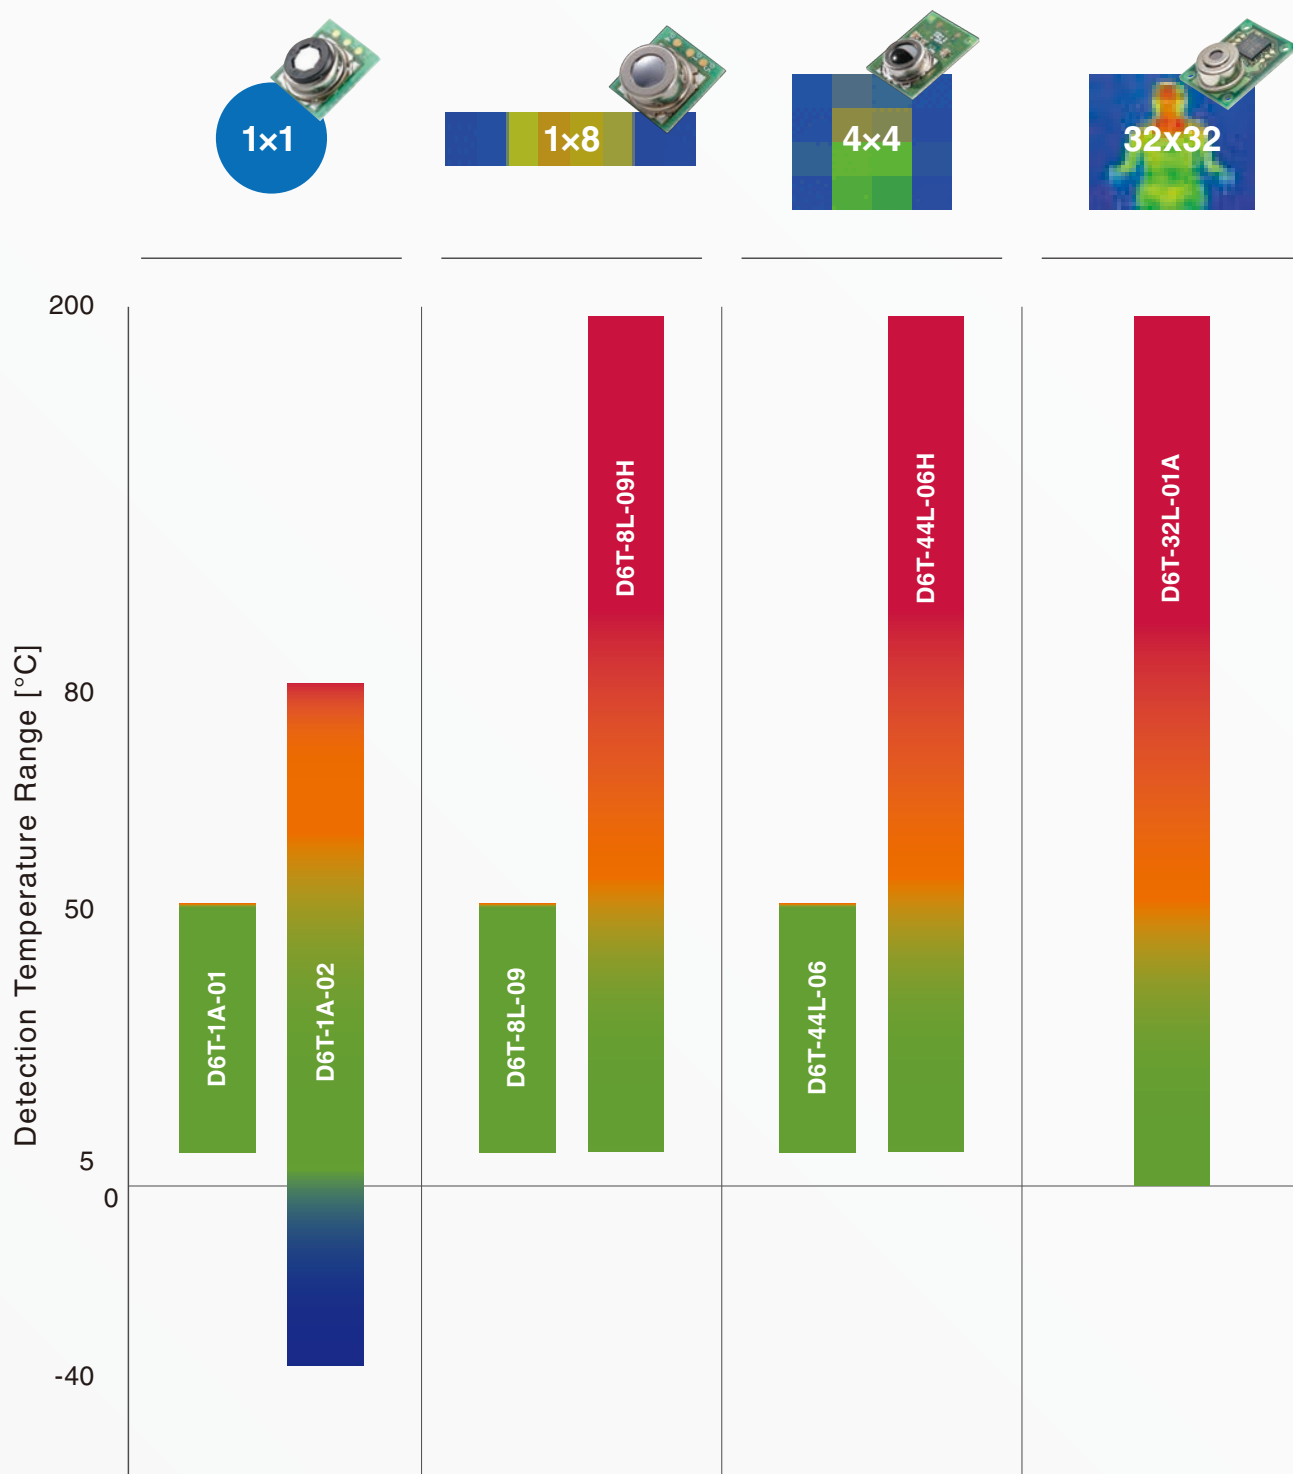

# Example Applications

The sensors can be used in a wide range of applications, depending on the temperature measurement range.

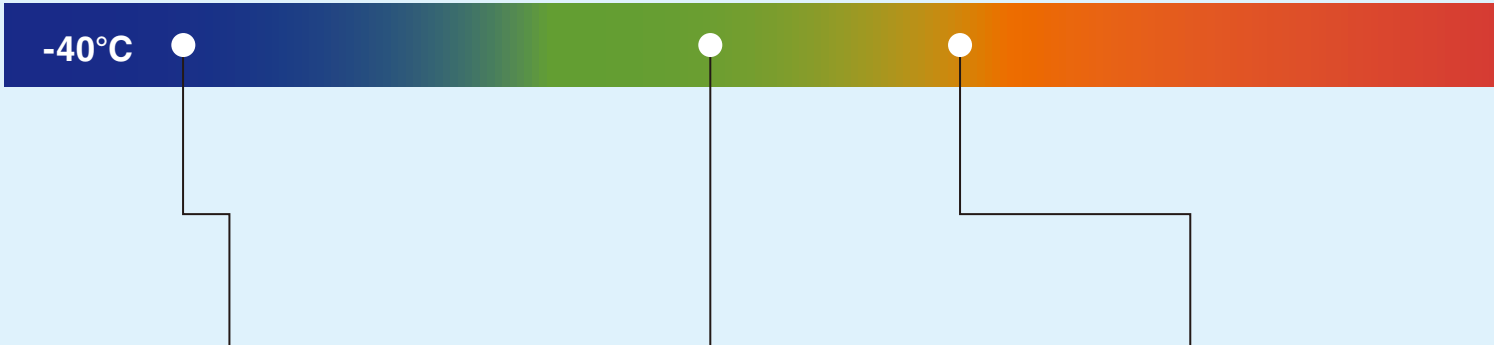

## Refrigerator Interior & Room Temperature Detection

Able to detect temperature from a long distance



Home appliances (refrigerators & air conditioners)

### Recommended Models

-  1x1
-  1x8
-  4x4
-  32x32

## Human Presence Detection

Able to detect stationary human presence




Air conditioners & lighting systems

### Recommended Models

-  1x1
-  1x8
-  4x4
-  32x32

## Screening of Humans with Fever

Contributes to automated non-contact temperature detection

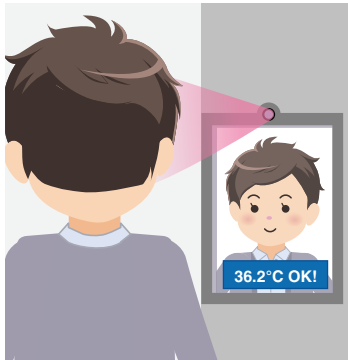

Room-Entry Management Equipment

### Recommended Models

-  1x1
-  1x8
-  4x4
-  32x32



200°C

## Abnormal High Temperature Monitoring

Contributes to prevention of fires due to overheating



Transformers & distribution boards

### Recommended Models



1x1



1x8



4x4




32x32

## Comparison with Pyroelectric Sensor

Both the pyroelectric sensor and non-contact MEMS thermal sensor can detect even the slightest amount of radiant energy from objects such as infrared radiation and convert them into temperature readings. However, unlike pyroelectric sensor that relies on motion detection, non-contact MEMS thermal sensor is able to detect the presence of stationary humans (or objects).


### Pyroelectric sensor

Converts temperature readings only when detecting “temperature changes” in the radiant energy” in its field of view.

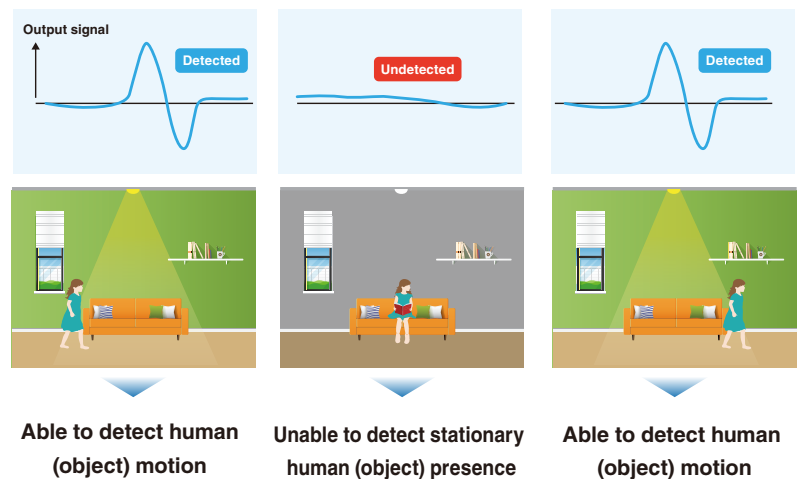





### MEMS thermal sensor (thermopile)

Converts temperature readings by “continuously detecting the temperature of radiant energy” in its field of view

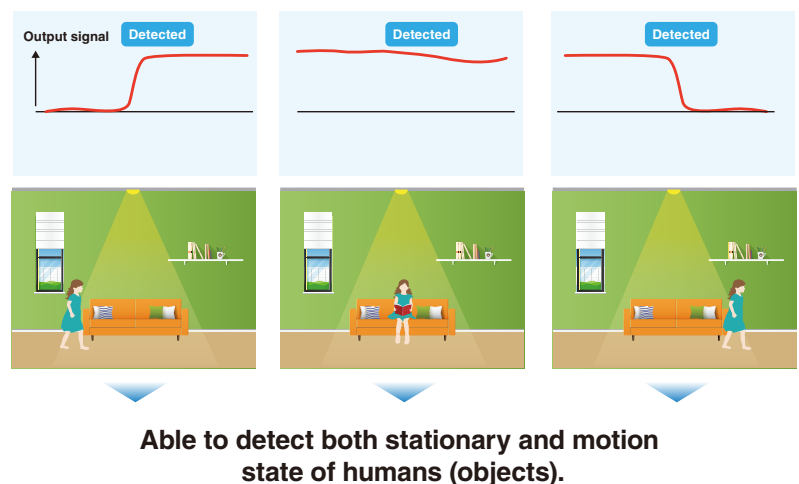

## Viewing Angle and Measurement Area

Choose your preferred sensor viewing angle to meet your application needs.

| Model                    | D6T-1A-01                                                                           | D6T-1A-02                | D6T-8L-09                                                                           | D6T-8L-09H | D6T-44L-06                                                                           | D6T-44L-06H | D6T-32L-01A                                                                           |
|--------------------------|-------------------------------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|
| Appearance               |    |                          |    |            |    |             |    |
| Number of elements       | 1(1x1)                                                                              |                          | 8(1x8)                                                                              |            | 16(4x4)                                                                              |             | 1024(32x32)                                                                           |
| Viewing angle            |                                                                                     |                          |                                                                                     |            |                                                                                      |             |                                                                                       |
| X-direction              | X = 58.0°                                                                           | X = 26.5°                | X = 54.5°                                                                           |            | X=44.2°                                                                              |             | X=90.0°                                                                               |
| Y-direction              | Y = 58.0°                                                                           | Y = 26.5°                | Y = 5.5°                                                                            |            | Y=45.7°                                                                              |             | Y=90.0°                                                                               |
| Size of measurement area |  |                          |  |            |  |             |  |
| Distance 10 cm           | X = 11 cm<br>Y = 11 cm                                                              | X = 4.7 cm<br>Y = 4.7 cm | X = 10 cm<br>Y = 1.0 cm                                                             |            | X = 8.1 cm<br>Y = 8.4 cm                                                             |             | X = 20 cm<br>Y = 20 cm                                                                |
| Distance 50 cm           | X = 55 cm<br>Y = 55 cm                                                              | X = 24 cm<br>Y = 24 cm   | X = 52 cm<br>Y = 4.8 cm                                                             |            | X = 41 cm<br>Y = 42 cm                                                               |             | X = 100 cm<br>Y = 100 cm                                                              |
| Distance 1 m             | X = 111 cm<br>Y = 111 cm                                                            | X = 47 cm<br>Y = 47 cm   | X = 103 cm<br>Y = 10 cm                                                             |            | X = 81 cm<br>Y = 84 cm                                                               |             | X = 200 cm<br>Y = 200 cm                                                              |
| Distance 2 m             | X = 222 cm<br>Y = 222 cm                                                            | X = 94 cm<br>Y = 94 cm   | X = 206 cm<br>Y = 20 cm                                                             |            | X = 162 cm<br>Y = 169 cm                                                             |             | X = 400 cm<br>Y = 400 cm                                                              |
| Distance 3 m             | X = 333 cm<br>Y = 333 cm                                                            | X = 141 cm<br>Y = 141 cm | X = 309 cm<br>Y = 30 cm                                                             |            | X = 244 cm<br>Y = 253 cm                                                             |             | X = 600 cm<br>Y = 600 cm                                                              |

\*. The sizes of measurement areas indicated above are for reference only.

\*. The size of the measurement area changes according to sensor mounting angle

### MEMS Non-Contact Thermal Sensor for Contactless Measurement

- Achieves the world's highest level<sup>\*2</sup> of SNR<sup>\*1</sup> by combining the in-house designed and manufactured ASIC and MEMS
- Direct temperature value output allows easy software design
- Variation of the number of elements (1 to 1024) and the temperature range (-40 to 200°C)

\*1. SNR: Signal-to-Noise Ratio. Compares the level of a signal to the level of background noise.

\*2. According to OMRON's research as of February 2021, except for D6T-32L-01A.

RoHS Compliant



Refer to Safety Precautions on page 18.



### Ordering Information

#### Thermal Sensors

| Element type | Model       | Shape |
|--------------|-------------|-------|
| 1×1          | D6T-1A-01   |       |
|              | D6T-1A-02   |       |
| 1×8          | D6T-8L-09   |       |
|              | D6T-8L-09H  |       |
| 4×4          | D6T-44L-06  |       |
|              | D6T-44L-06H |       |
| 32×32        | D6T-32L-01A |       |

#### Accessories (Sold separately)

| Type          | Model          |
|---------------|----------------|
| Cable Harness | D6T-HARNESS-02 |

#### Others

MEMS thermal sensors can be connected to OMRON sensor evaluation boards.

The below 3 types of platform are applicable. Evaluation can be performed easily by connecting thermal sensor, evaluation board, and harness to the platform.

| Platform                        | Evaluation Board | Harness for connection (Evaluation Board - D6T) | Sample Source Code                                                                                                                |
|---------------------------------|------------------|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| For Raspberry Pi <sup>*1</sup>  | 2JCIE-EV01-RP1   | 2JCIE-HARNESS-01                                | <a href="https://github.com/omron-devhub/d6t-2jcieev01-raspberrypi">https://github.com/omron-devhub/d6t-2jcieev01-raspberrypi</a> |
| For Arduino <sup>*2</sup>       | 2JCIE-EV01-AR1   | 2JCIE-HARNESS-01                                | <a href="https://github.com/omron-devhub/d6t-2jcieev01-arduino">https://github.com/omron-devhub/d6t-2jcieev01-arduino</a>         |
| For ESP32 Feather <sup>*3</sup> | 2JCIE-EV01-FT1   | 2JCIE-HARNESS-01                                | <a href="https://github.com/omron-devhub/d6t-2jcieev01-arduino">https://github.com/omron-devhub/d6t-2jcieev01-arduino</a>         |

For details of evaluation boards and sample source codes, refer to the following website.

(<https://components.omron.com/sensor/evaluation-board/2jcie>)

\*1. Raspberry Pi is a registered trademark of the Raspberry Pi Foundation.

\*2. Arduino is a registered trademark of Arduino LLC and Arduino SRL.

\*3. Feather is a registered trademark of Adafruit Industries LLC.

### Model Number Legend

D6T-□-□ □  
(1) (2) (3)

#### (1) Number of elements

1A : 1 (1 × 1)

8L : 8 (1 × 8)

44L : 16 (4 × 4)

32L : 1024 (32 × 32)

#### (2) Viewing angle

01 : X direction, Y direction=58.0°

02 : X direction, Y direction=26.5°

09 : X direction=54.5°, Y direction=5.5°

06 : X direction=44.2°, Y direction=45.7°

01A : X direction, Y direction=90°

#### (3) Special Functions

H : High-temperature type

Non-display : Standard sensor

Ratings, Specifications, and Functions

Ratings

| Item                        | Model | D6T-1A-01      | D6T-1A-02   | D6T-8L-09                                      | D6T-8L-09H | D6T-44L-06  | D6T-44L-06H | D6T-32L-01A |
|-----------------------------|-------|----------------|-------------|------------------------------------------------|------------|-------------|-------------|-------------|
| Power supply voltage        |       | 4.5 to 5.5 VDC |             |                                                |            |             |             |             |
| Storage temperature range   |       | -20 to 80°C    | -40 to 80°C | -20 to 80°C<br>(with no icing or condensation) |            | -10 to 60°C |             | -20 to 80°C |
| Operating temperature range |       | 0 to 60°C      | -40 to 80°C | 0 to 60°C<br>(with no icing or condensation)   |            | 0 to 50°C   |             | -10 to 70°C |
| Storage humidity range      |       | 95% max.       | 95% max.    | 95% max.<br>(with no icing or condensation)    |            | 85% max.    |             | 95% max.    |
| Operating humidity range    |       | 20% to 95%     | 20% to 95%  | 20% to 95%<br>(with no icing or condensation)  |            | 20% to 85%  |             | 20% to 95%  |

Characteristics

| Item                                  | Model       | D6T-1A-01                                                                                                                              | D6T-1A-02 | D6T-8L-09    | D6T-8L-09H | D6T-44L-06 | D6T-44L-06H | D6T-32L-01A                                                                                                    |
|---------------------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------|------------|------------|-------------|----------------------------------------------------------------------------------------------------------------|
| View angle *1                         | X direction | 58.0°                                                                                                                                  | 26.5°     | 54.5°        |            |            | 44.2°       | 90°                                                                                                            |
|                                       | Y direction | 58.0°                                                                                                                                  | 26.5°     | 5.5°         |            |            | 45.7°       | 90°                                                                                                            |
| Object temperature output accuracy *2 | Accuracy 1  | ±1.5°C max.<br>Measurement conditions: Vcc = 5.0 V<br>(1) Tx = 25°C, Ta = 25°C<br>(2) Tx = 45°C, Ta = 25°C<br>(3) Tx = 45°C, Ta = 45°C |           |              |            |            |             | Within ±3.0°C<br>Measurement conditions:<br>Vcc = 5.0 V<br>Tx = 25°C,<br>Ta = 25°C<br>Central 16x16-pixel area |
| Current consumption                   |             | 3.5 mA typical                                                                                                                         |           | 5 mA typical |            |            |             | 19 mA typical                                                                                                  |

Functions


| Item                                                  | Model                                                                                                                                      | D6T-1A-01                           | D6T-1A-02                           | D6T-8L-09                           | D6T-8L-09H                                          | D6T-44L-06                                           | D6T-44L-06H                            | D6T-32L-01A |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-----------------------------------------------------|------------------------------------------------------|----------------------------------------|-------------|
| Object temperature detection range *2                 |                                                                                                                                            | 5 to 50°C                           | -40 to 80°C                         | 5 to 50°C                           | 5 to 200°C                                          | 5 to 50°C                                            | 5 to 200°C                             | 0 to 200°C  |
| Ambient temperature detection range *2                |                                                                                                                                            | 5 to 45°C                           | -40 to 80°C                         | 5 to 45°C                           | 5 to 45°C                                           | 5 to 45°C                                            | 5 to 45°C                              | 0 to 80°C   |
| Output specifications                                 | Digital values that correspond to the object temperature (Tx) and reference temperature (Ta) are output from a serial communications port. |                                     |                                     |                                     |                                                     |                                                      |                                        |             |
| Output form (Object temperature detection)            | Binary code (10 times the detected temperature (°C))                                                                                       |                                     |                                     |                                     | Binary code (5 times the detected temperature (°C)) | Binary code (10 times the detected temperature (°C)) |                                        |             |
| Output form (Reference temperature inside the sensor) | Binary code (10 times the detected temperature (°C))                                                                                       |                                     |                                     |                                     |                                                     |                                                      |                                        |             |
| Communications form                                   | I2C compliant                                                                                                                              |                                     |                                     |                                     |                                                     |                                                      |                                        |             |
| Temperature resolution (NETD) *3                      | 0.02°C (Data update cycle 100 msec)                                                                                                        | 0.06°C (Data update cycle 100 msec) | 0.03°C (Data update cycle 250 msec) | 0.03°C (Data update cycle 250 msec) | 0.06°C (Data update cycle 300 msec)                 | 0.06°C (Data update cycle 300 msec)                  | 0.33°C *4 (Data update cycle 200 msec) |             |

\*1. Refer to *Field of View Characteristics*.  
\*2. Refer to *Object Temperature Detection Range*.  
\*3. Reference data  
\*4. Taken to be the average value of the central 4 pixels.




Object Temperature Detection Range


D6T-44L-06, D6T-8L-09, D6T-1A-01

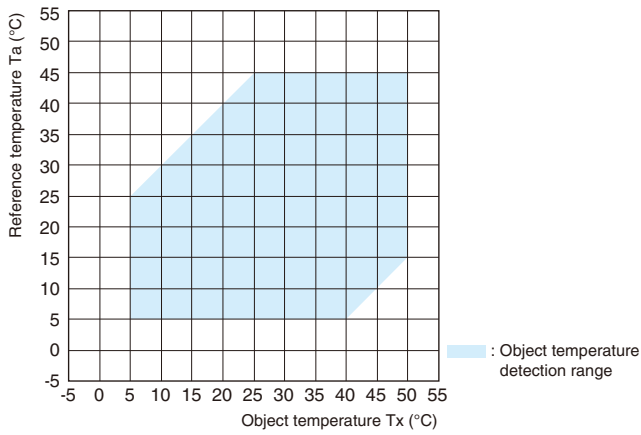


D6T-1A-02

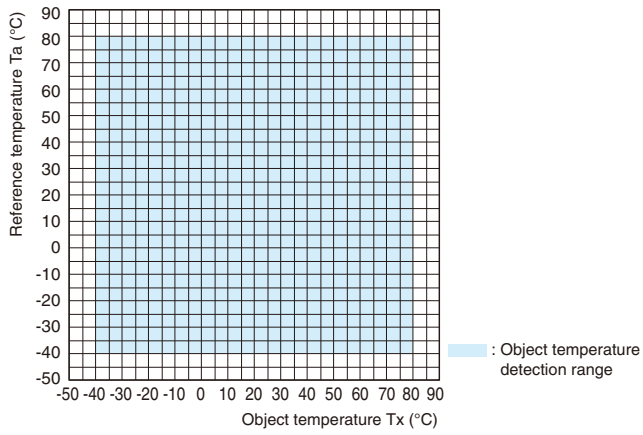

D6T-44L-06H, D6T-8L-09H

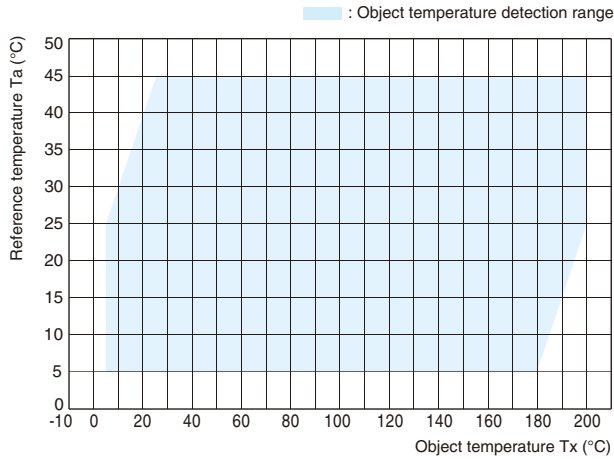


D6T-32L-01A

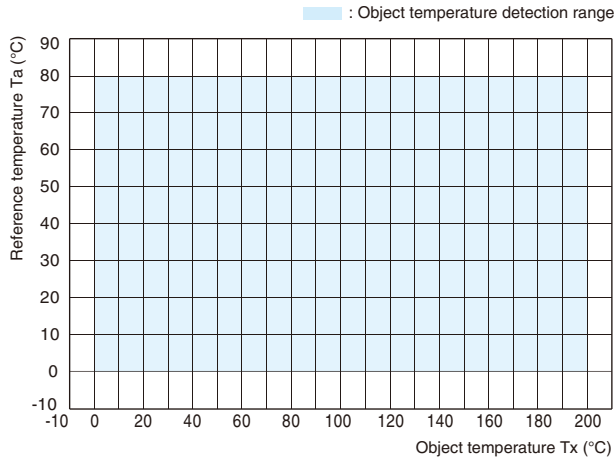

Connections

Thermal Sensor Configuration Diagram

<D6T-8L-09>  
<D6T-8L-09H>

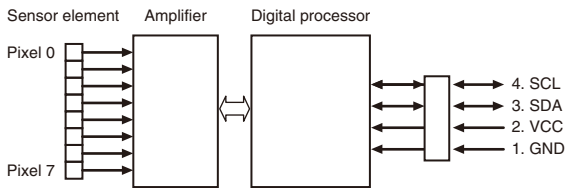


Note: The D6T-44L-06 has pixels 0 to 15.  
The D6T-44L-06H has pixels 0 to 15.  
The D6T-1A-01 has pixel 0.  
The D6T-1A-02 has pixel 0.  
The D6T-32L-01A has pixel 0 to 1023.

Terminal Arrangement


| Terminal | Name | Function                            | Remarks                                                    |
|----------|------|-------------------------------------|------------------------------------------------------------|
| 1        | GND  | Ground                              |                                                            |
| 2        | VCC  | Positive power supply voltage input |                                                            |
| 3        | SDA  | Serial data I/O line                | Connect the open-drain SDA terminal to a pull-up resistor. |
| 4        | SCL  | Serial clock input                  | Connect the open-drain SCL terminal to a pull-up resistor. |

Field of View Characteristics


D6T-44L-06  
D6T-44L-06H  
Field of View in X Direction



Field of View in Y Direction




Detection Area for Each Pixel

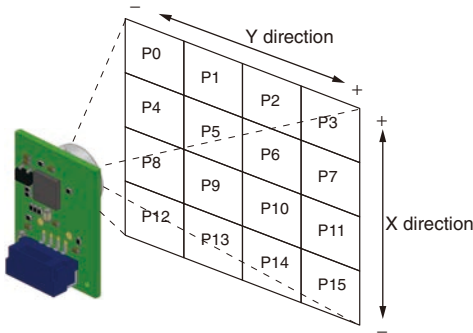


Note: Definition of view angle: Using the maximum sensor output as a reference, the angular range where the Sensor output is 50% or higher when the angle of the Sensor is changed is defined as the View angle.


D6T-8L-09  
D6T-8L-09H  
Field of View in X Direction



Field of View in Y Direction




Detection Area for Each Pixel

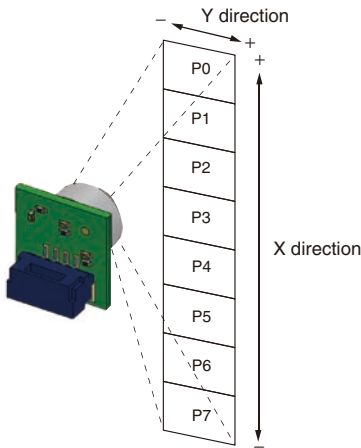


Note: Definition of view angle: Using the maximum Sensor output as a reference, the angular range where the Sensor output is 50% or higher when the angle of the Sensor is changed is defined as the view angle.

### D6T-1A-01

#### Field of View in X Direction




#### Field of View in Y Direction




### D6T-1A-02

#### Field of View in X Direction




#### Field of View in Y Direction




Note: Definition of view angle: Using the maximum Sensor output as a reference, the angular range where the Sensor output is 50% or higher when the angle of the Sensor is changed is defined as the view angle.

#### Detection Area for Each Pixel




### D6T-32L-01A

#### Field of View in X Direction




#### Field of View in Y Direction



Note: Definition of view angle: Using the maximum Sensor output as a reference, the angular range where the Sensor output is 50% or higher when the angle of the Sensor is changed is defined as the view angle.

#### Detection Area for Each Pixel

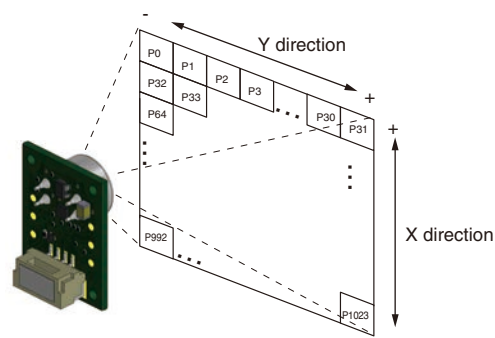


## Dimensions

CAD Data Please visit our CAD Data website, which is noted on the last page.


(Unit: mm)

D6T-44L-06  
D6T-44L-06H





CAD Data

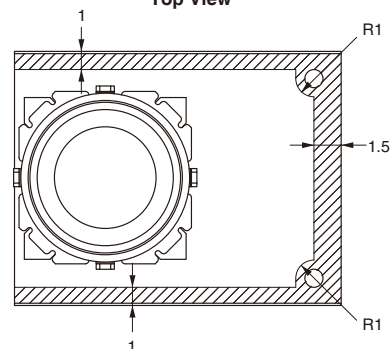Supporting and Mounting Area (Shaded Portion)  
Top View


## Bottom View

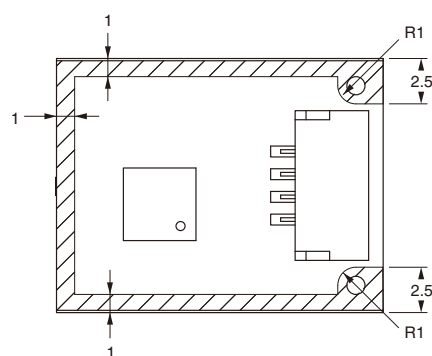


Note: Due to insulation distance limitations, do not allow metal parts to come into contact with the Sensor.

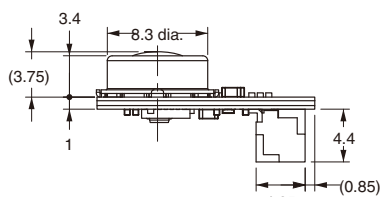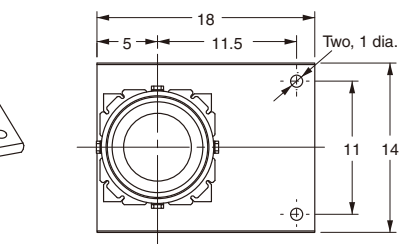D6T-8L-09  
D6T-8L-09H





CAD Data

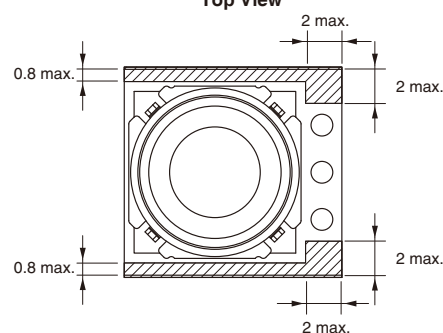Supporting and Mounting Area (Shaded Portion)  
Top View

## Bottom View










Note: Due to insulation distance limitations, do not allow metal parts to come into contact with the Sensor.










Note: Unless otherwise specified, a tolerance of  $\pm 0.3$  mm applies to all dimensions.

## D6T-1A-01 D6T-1A-02

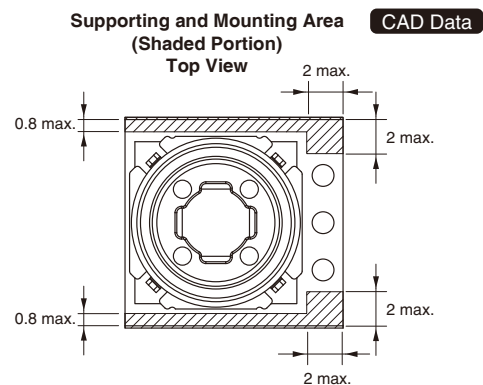

Note: Due to insulation distance limitations, do not allow metal parts to come into contact with the Sensor.

## D6T-32L-01A

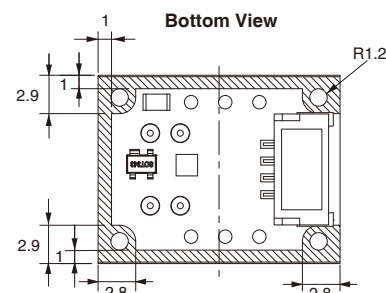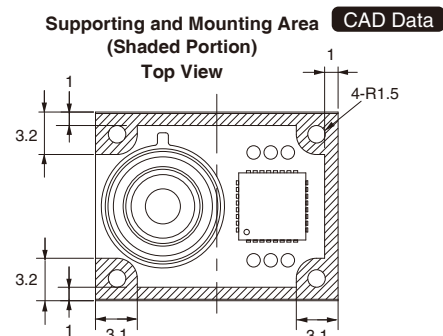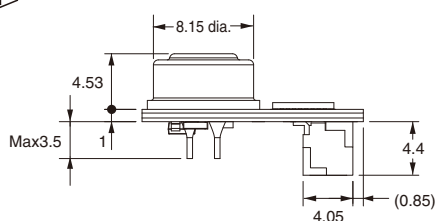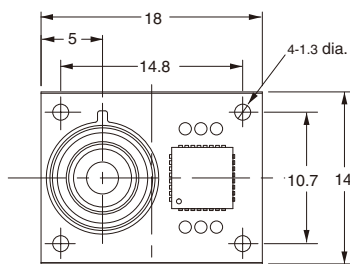


Note: Due to insulation distance limitations, do not allow metal parts to come into contact with the Sensor.

## D6T-HARNESS-02 (Optional - sold separately)

### Cable Color

GND → BLACK Wire  
VCC → RED Wire  
SDA → BLUE Wire  
SCL → YELLOW Wire

\* Length of Cable removed sheath.

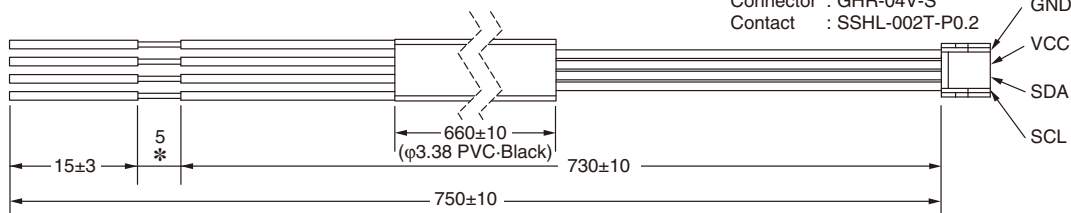

Cable :UL1061.AWG#28  
UL Tube : T-105-2 No.8  
Connector : GHR-04V-S  
Contact : SSLH-002T-P0.2

CAD Data

Note: Unless otherwise specified, a tolerance of  $\pm 0.3$  mm applies to all dimensions.



## Safety Precautions

### Precautions for Correct Use

#### ● Installation

- The sensor may not achieve the characteristics given in this datasheet due to the ambient environment or installation location. Before using the Sensor, please acquire an adequate understanding and make a prior assessment of Sensor characteristics in your actual system.

#### ● Operating Environment

- Do not use the Sensor in locations where dust, dirt, oil, and other foreign matter will adhere to the lens. This may prevent correct temperature measurements.
- Do not use the Sensor in any of the following locations.
  - Locations where the Sensor may come into contact with water or oil
  - Outdoors
  - Locations subject to direct sunlight.
  - Locations subject to corrosive gases (in particular, chloride, sulfide, or ammonia gases).
  - Locations subject to extreme temperature changes
  - Locations subject to icing or condensation.
  - Locations subject to excessive vibration or shock.

#### ● Noise Countermeasures


- The Sensor does not contain any protective circuits. Never subject it to an electrical load that exceeds the absolute maximum ratings for even an instance. The circuits may be damaged. Install protective circuits as required so that the absolute maximum ratings are not exceeded.
- Keep as much space as possible between the Sensor and devices that generates high frequencies (such as high-frequency welders and high-frequency sewing machines) or surges.
- Attach a surge protector or noise filter on nearby noise-generating devices (in particular, motors, transformers, solenoids, magnetic coils, or devices that have an inductance component).
- In order to prevent inductive noise, separate the connector of the Sensor from power lines carrying high voltages or large currents. Using a shielded line is also effective.
- If a switching regulator is used, check that malfunctions will not occur due to switching noise from the power supply.

#### ● Handling

- This Sensor is a precision device. Do not drop it or subject it to excessive shock or force. Doing so may damage the Sensor or change its characteristics. Never subject the connector to unnecessary force. Do not use a Sensor that has been dropped.
- Take countermeasures against static electricity before you handle the Sensor.
- Turn OFF the power supply to the system before you install the Sensor. Working with the Sensor while the power supply is turned ON may cause malfunctions.
- Secure the Sensor firmly so that the optical axis does not move.
- Install the Sensor on a flat surface. If the installation surface is not even, the Sensor may be deformed, preventing correct measurements.
- Do not install the Sensor with screws. Screws may cause the resist to peel from the board. Secure the Sensor in a way that will not cause the resist to peel.
- Always check operation after you install the Sensor.
- Use the specified connector (GHR-04 from JST) and connect it securely so that it will not come off. If you solder directly to the connector terminals, the Sensor may be damaged.
- Make sure to wire the polarity of the terminals correctly. Incorrect polarity may damage the Sensor.
- Never attempt to disassemble the Sensor.
- Do not use the cable harness to the other product.

## This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin, light gray dashed lines. The grid covers the entire area of the page, leaving no margins or other markings.

## Information of Related Products



### D6T MEMS Thermal Sensor User's Manual

Catalog No.  
A284-E1



### 2JCIE-EV Sensor Evaluation Board

Catalog No.  
A297-E1



### D6F MEMS Flow Sensor

Catalog No.  
X211-E1



### Sensor Selection Guide

Catalog No.  
Y232-E1

Please check each region's Terms & Conditions by region website.

## OMRON Corporation

Electronic and Mechanical Components Company

### Regional Contact

#### Americas

<https://components.omron.com/>

#### Asia-Pacific

<https://ecb.omron.com.sg/>

#### Korea

<https://www.omron-ecb.co.kr/>

#### Europe

<http://components.omron.eu/>

#### China

<https://www.ecb.omron.com.cn/>

#### Japan

<https://www.omron.co.jp/ecb/>