

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

CHARX power basic, Fast charging module for setting up DC charging stations, 19" rack mounting, output: 30 V DC...1000 V DC / 0 A...100 A



Product description

The highly efficient power electronics system for rack mounting from Phoenix Contact features a high degree of investment security. It enables the cost-effective operation of your DC charging infrastructure for the fast charging of electric vehicles. The modular and scalable system is optimized for DC charging with high voltages and currents. Each system cabinet can provide a charging power of up to 360 kW.

Your advantages

- Low installation costs with Plug and Play and efficient operation due to the high degree of efficiency
- Save space with the innovative design and high power density
- Scalable power for each charging point with the flexible assembly of system cabinets and connection of power modules
- The operation of large charging parks in the megawatt range is made possible by connecting multiple system cabinets together

Commercial data

Item number	1296467
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CM28
Product key	CMER3E
GTIN	4063151531973
Weight per piece (including packing)	32,000 g
Weight per piece (excluding packing)	27,000 g
Customs tariff number	85044095
Country of origin	CN

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

Technical data

Input data

Digital

Nominal power consumption	31577 VA
---------------------------	----------

DC operation

Input voltage range	300 V DC ... 825 V DC
Derating	< 650 V DC ... 300 V DC (46 W/V)
Nominal input voltage range	650 V DC ... 825 V DC
Input current	48 A (650 V DC) 38 A (825 V DC)
Inrush current limitation	< 60 A
Insulation resistance	> 10 MΩ
Supply system configuration	DC grid (DC±, PE)

MPPT mode

Input voltage range	300 V DC ... 740 V DC
Nominal input voltage range	650 V DC ... 740 V DC
Start-up voltage	min. 375 V DC
Current consumption	< 50 A (650 V DC)
Efficiency	> 99.5 % (>5 kW)

Output data

Efficiency	> 95 % ($P_{Out} > 50\%$)
Output voltage range	30 V DC ... 1000 V DC
Output current range	0 A ... 100 A
Nominal power	30 kW
Power dissipation standby	< 14 W
Protection against overvoltage at the output (OVP)	> 1040 V DC
Derating	> 55 °C (3.2 A/K) > 55 °C (1 kW/K)
Control deviation	< 0.5 % (Voltage deviation static load change 20% ... 100%) < 1 % (Current deviation Static load change 20 % ... 100 %) ± 0.2 % (Input voltage change ±20 %)
Switch-on delay	< 8 s
Overshoot behavior	± 3 % (Switch-on procedure)

Connection data

Input

Designation	Input
Identification	DC IN: + / - / PE

Conductor connection

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

Connection method	Push-in connection
rigid	1.5 mm ² ... 16 mm ²
	10 mm ² (recommended)
flexible	1.5 mm ² ... 16 mm ²
	10 mm ² (recommended)
rigid (AWG)	15 ... 5 (Cu)
	7 (recommended)
Stripping length	18 mm (rigid/flexible)

Output

Designation	Output
Identification	DC OUT: + / -

Conductor connection

Connection method	T-LOX knee lever connection
rigid	10 mm ² ... 50 mm ²
	25 mm ² (recommended)
flexible	16 mm ² ... 50 mm ²
	25 mm ² (recommended)
rigid (AWG)	8 ... 0 (Cu)
	4 (recommended)
Stripping length	20 mm (10 mm ² ... 25 mm ² = 18 mm, 35 mm ² ... 50 mm ² = 20 mm)

Interfaces

CAN-Bus

Interface	CAN bus
Number of interfaces	1
Connection method	2x RJ45
Supported protocols	CAN 2.0B
Locking	Locking clip
Transmission physics	wired
Topology	Daisy Chain
Transmission speed	125 kbps (Default)
	500 kbps
Transmission length	max. 20 m
Termination resistor	120 Ω (Terminating the end device)
Number of power modules as CAN bus devices	max. 48

Electrical properties

Electrical isolation between input and output	yes
Insulation voltage input/output	2121 V DC
Insulation voltage input, output / housing	2121 V DC
Insulation voltage input, output/signal, communication	4242 V DC
Insulation voltage signal, communication/housing	707 V DC

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

Product properties

Product type	DC power module
Product family	CHARX power basic
MTBF (IEC 61709, SN 29500)	> 300000 h
Service life	90000 h (40 °C, electrolytic capacitors) 70000 h (40 °C, fan)
Internal fan	yes
Flow direction	from front to back

Data management status


Article revision	01
------------------	----

Insulation characteristics

Protection class	I
Pollution degree	2

Dimensions

Item dimensions

Width	483 mm
Height	134 mm
Depth	550 mm
Dimensional drawing	
Rack unit	3 U

Mounting

Mounting type	19" rack mounting
---------------	-------------------

Material specifications

Housing material	Zn-Al alloy
------------------	-------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Overtemperature protection (OTP)	> 75 °C
Maximum altitude	≤ 4000 m (Derating >2000 m: 10% / 1000 m)
Permissible humidity (operation)	≤ 95 % (non-condensing)
Noise level	< 60 dB (1 m)

Standards and regulations

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

Overvoltage category

IEC 60664-1	II
-------------	----

Electric vehicle conductive charging system - Part 1: General requirements

Standard designation	Electric vehicle conductive charging system - Part 1: General requirements
Standards/specifications	IEC 61851-1

Electric vehicle conductive charging system - Part 21-2: EMC requirements for off board electric vehicle charging systems

Standard designation	Electric vehicle conductive charging system - Part 21-2: EMC requirements for off board electric vehicle charging systems
Standards/specifications	IEC 61851-21-2 (Class B)

Electric vehicle conductive charging system – Part 23: DC electric vehicle charging station

Standard designation	Conductive charging systems for electric vehicles – Part 23: DC supply equipment for electric vehicles
Standards/specifications	IEC 61851-23

Standard for Safety for Electric Vehicle (EV) Charging System Equipment

Standard designation	Standard for Safety for Electric Vehicle (EV) Charging System Equipment
Standards/specifications	ANSI/UL 2202

EMC data

EMC requirements for noise emission	EN 61000-6-3
EMC requirements for noise immunity	EN 61000-6-2

CHARX PS-M2/825DC/1000DC/30KW - DC power module




1296467

<https://www.phoenixcontact.com/us/products/1296467>

Drawings

Schematic diagram

Housing

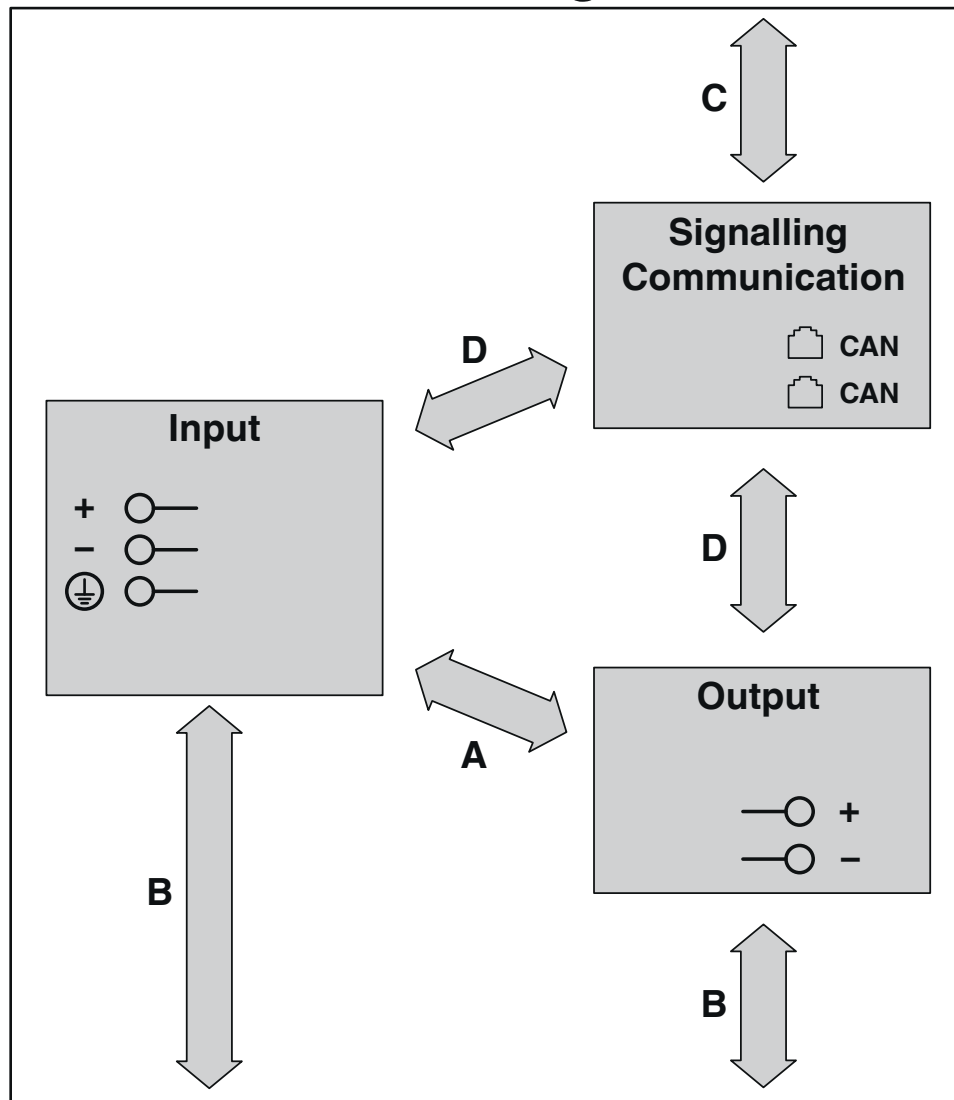


CHARX PS-M2/825DC/1000DC/30KW - DC power module




1296467

<https://www.phoenixcontact.com/us/products/1296467>


Block diagram

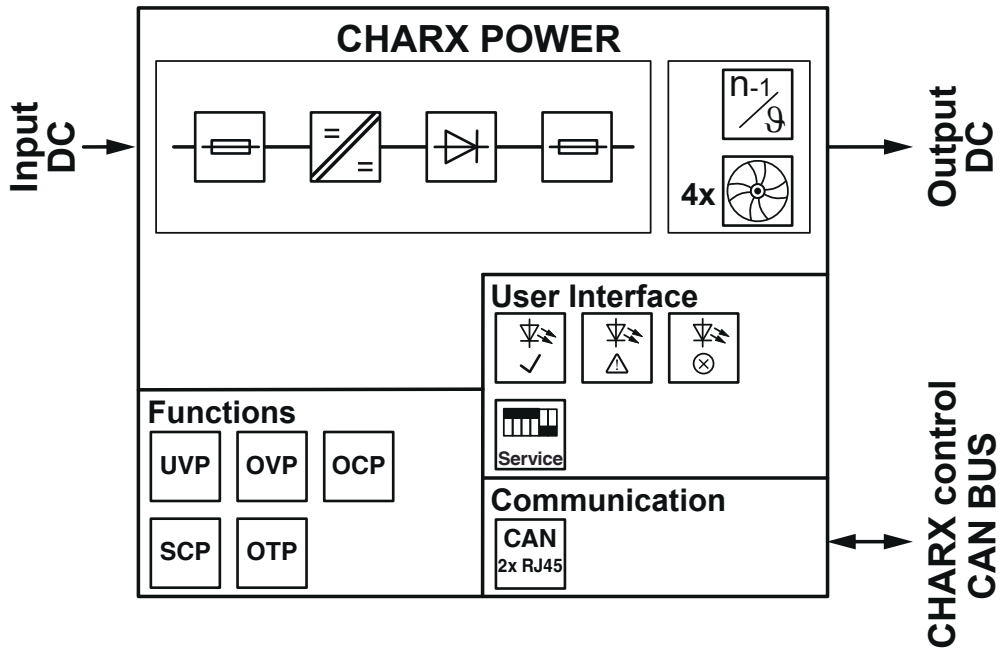

Dimensional drawing

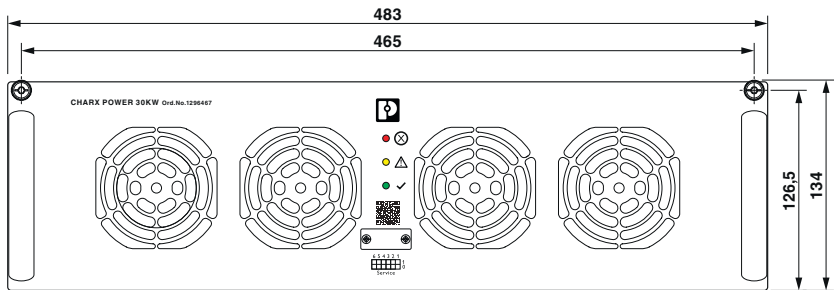

Dimensional drawing

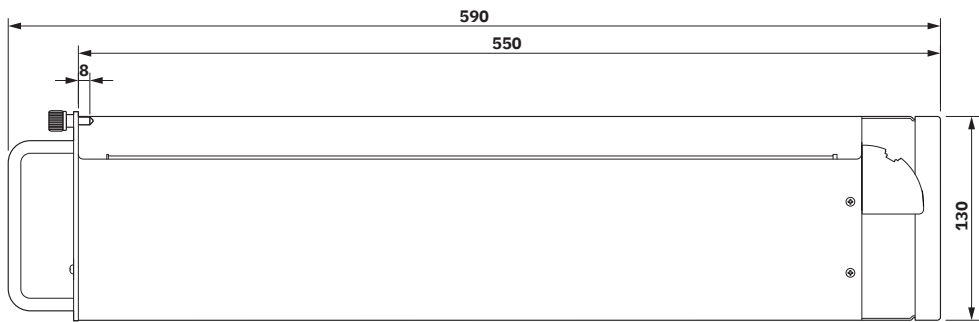


CHARX PS-M2/825DC/1000DC/30KW - DC power module




1296467

<https://www.phoenixcontact.com/us/products/1296467>

Diagram

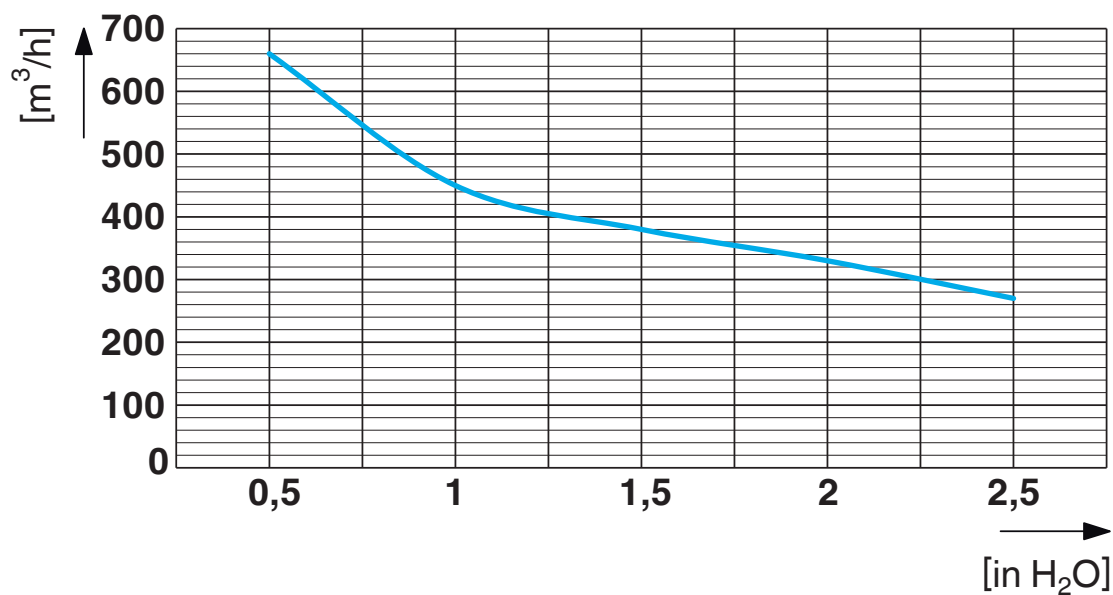

Dimensional drawing


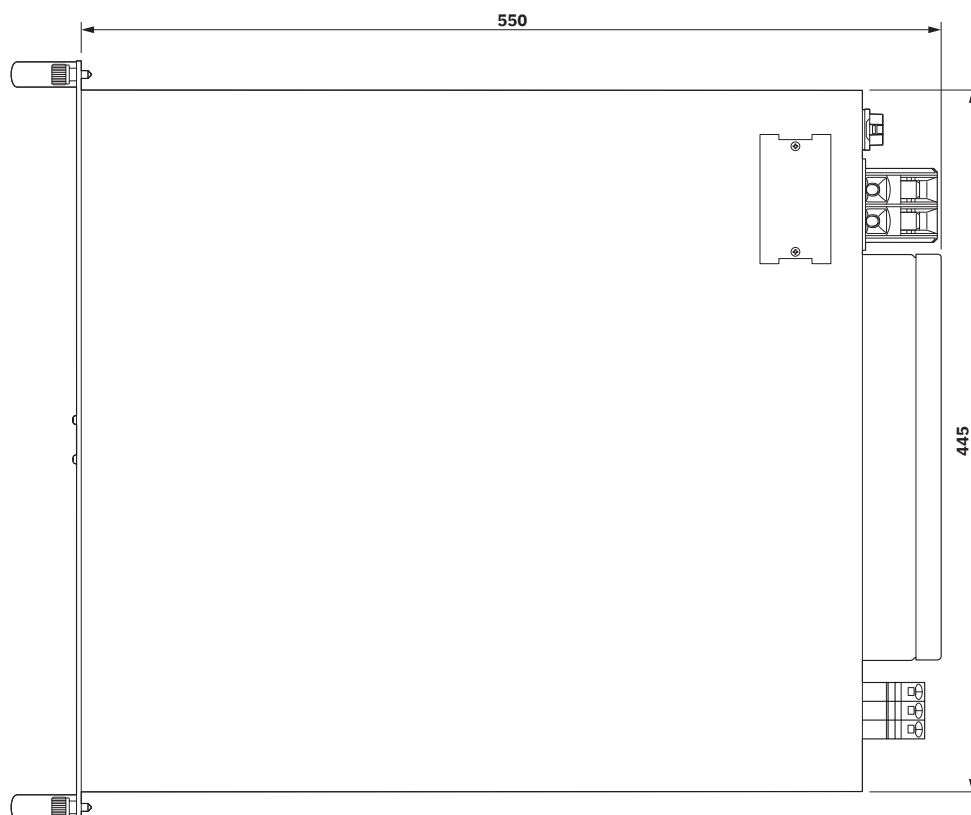


CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

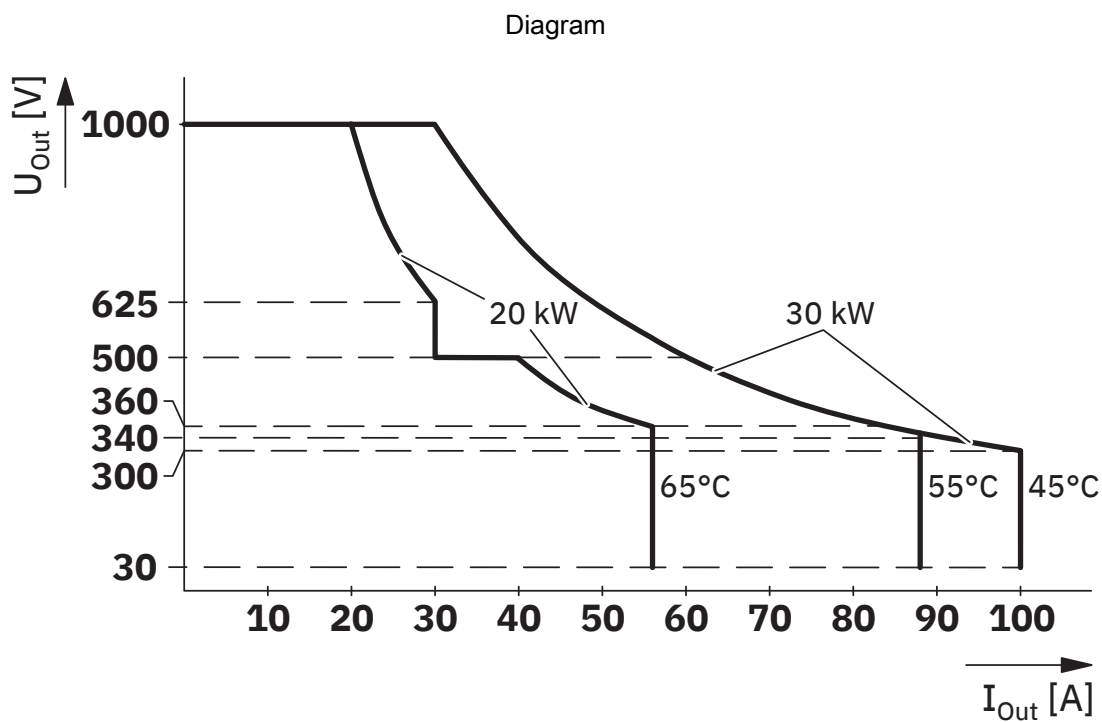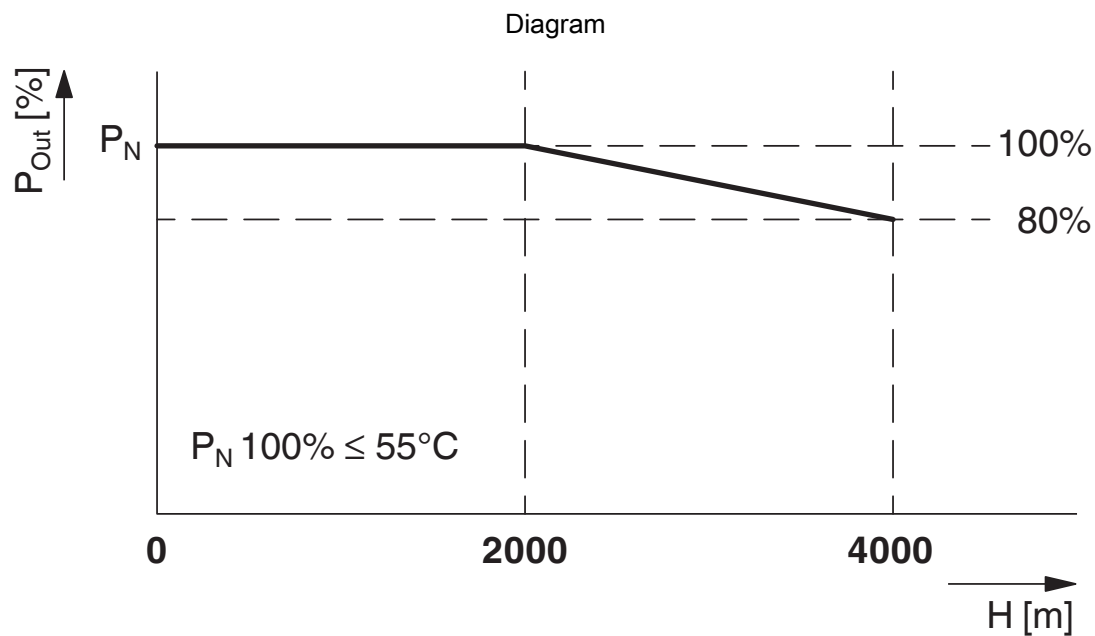


CHARX PS-M2/825DC/1000DC/30KW - DC power module





1296467
<https://www.phoenixcontact.com/us/products/1296467>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1296467>

**EAC**
Approval ID: RU*DE*01.B.02076/21

	TÜV SÜD Type tested Approval ID: N8A 029429 0025			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	125 V	-	-	- 1.5

**EAC**
Approval ID: RU*DE*01.B.85589/21

EU-Type Examination Certificate
Approval ID: E8A 029429 0046

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467
<https://www.phoenixcontact.com/us/products/1296467>

Classifications

ECLASS

ECLASS-11.0	27040701
ECLASS-12.0	27040701
ECLASS-13.0	27040701

ETIM

ETIM 9.0	EC002540
----------	----------

1296467
<https://www.phoenixcontact.com/us/products/1296467>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-10
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	ab7313f2-f9cd-4d6c-9474-3ce5c65d7b29

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467


<https://www.phoenixcontact.com/us/products/1296467>

Accessories

VS-IP20-OE-94F-LI/2,0 - Network cable

1415255

<https://www.phoenixcontact.com/us/products/1415255>



Assembled Ethernet cable, CAT6, shielded, 4-pair, AWG 26 stranded (7-wire), RAL 5021 (water blue), RJ45 plug/IP20 on free conductor end, line, length 2 m

EV-PLCC-AC1-DC1 - DC charging controller

1624130

<https://www.phoenixcontact.com/us/products/1624130>



Programmable charging controller for DC and AC charging of electric vehicles in accordance with IEC 61851-1,-23, DIN SPEC 70121, and CHAdeMO, with integrated cellular modem

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

CHARX CONTROL-M2/150KW - DC charging controller

1311433

<https://www.phoenixcontact.com/us/products/1311433>



CHARX control integrated, Power control unit for the construction of DC charging stations, 19" rack mounting, input: 0 V DC...1000 V DC, output: 0 V DC...1000 V DC / 0 A DC...500 A DC

EV-T2M4CC-DC250A-5,0M70ESBK11 - DC charging cable

1107339

<https://www.phoenixcontact.com/us/products/1107339>



CHARX connect standard, DC charging cable, with vehicle charging connector and open cable end, for charging electric vehicles (EV) with direct current (DC), with connected PP contact, with replaceable mating face frame, with analog temperature sensors, CCS type 2, IEC 62196-3, 250 A / 1000 V (DC), PHOENIX CONTACT logo, cable: 5 m, black, straight

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

EV-T1G2CC-DC200A-5,0M1ASBK11 - DC charging cable

1051695

<https://www.phoenixcontact.com/us/products/1051695>



CHARX connect standard, DC charging cable, with vehicle charging connector and open cable end, for charging electric vehicles (EV) with direct current (DC), with charging connector holder, with analog temperature sensors, CCS type 1, SAE J1772, IEC 62196-3, 200 A / 1000 V (DC), PHOENIX CONTACT logo, cable: 5 m, black, straight

EEM-PM157-SLP - Measuring device

1269236

<https://www.phoenixcontact.com/us/products/1269236>



Direct current energy meter with direct measurement up to 1000 V / 650 A, with RS-485 interfaces for the programming software and the DC charging controller, correction of charging cable losses, operating temperature up to +80°C, certified in accordance with measuring and calibration law

CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

EV-RFID-ELT-IP65 - RFID device

1309687

<https://www.phoenixcontact.com/us/products/1309687>

CHARX control modular, RFID device, for connection to CHARX control modular AC charging controllers, in housing



WP 6185-WHPS - Web panel

1290807

<https://www.phoenixcontact.com/us/products/1290807>

IP66 Touch panel with 18.5-inch widescreen (16:9) HD, PCAP display, Software: Qt Browser



CHARX PS-M2/825DC/1000DC/30KW - DC power module



1296467

<https://www.phoenixcontact.com/us/products/1296467>

RIF-1-BPT/2X21 - Relay base

2900931

<https://www.phoenixcontact.com/us/products/2900931>



Relay base RIF-1..., for miniature power relay with 1 or 2 changeover contacts or solid-state relays of the same design, Push-in connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com